




## Insulated Flared Butt Splices

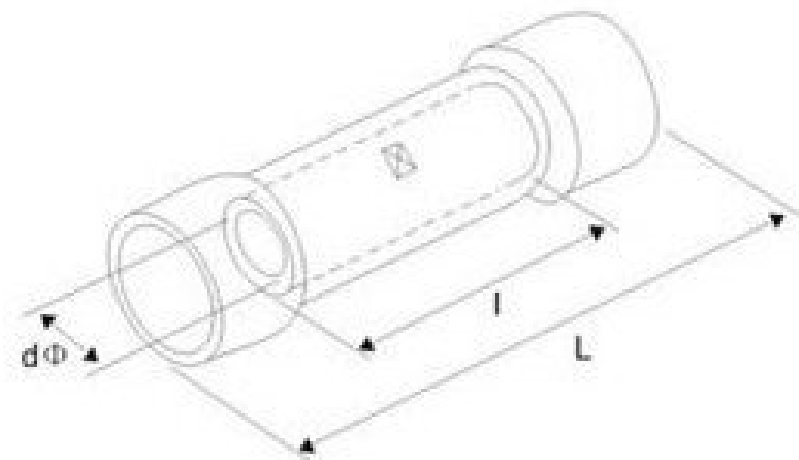

Part Number	AWG	mm <sup>2</sup>	l	dø	L	Max Current	Colour
CA82-BV55-P	12-10	4-6	15	3.4	26	48A	Yellow
CA83-BV2-P	16-14	1.5-2.5	15	2.3	26	27A	Blue
CA84-BV125-P	22-16	0.5-1.5	15	1.7	26	19A	Red