


| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| G | 14 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | D2 | | REVISED PER ECO-11-010839 | 25MAY11 | RK | HMR |

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

| | |
|--------------------------|---------------------------|
| AMP WIRE RANGE | E13288 Listed |
| 26-22 AWG STRANDED | NOT LISTED |
| LR7189 Certified | MILITARY P/N AND CLASS |
| NOT CERTIFIED | NOT APPLICABLE |

- STAMP AMP APPROX AS SHOWN
- CLEANED, UNPLATED

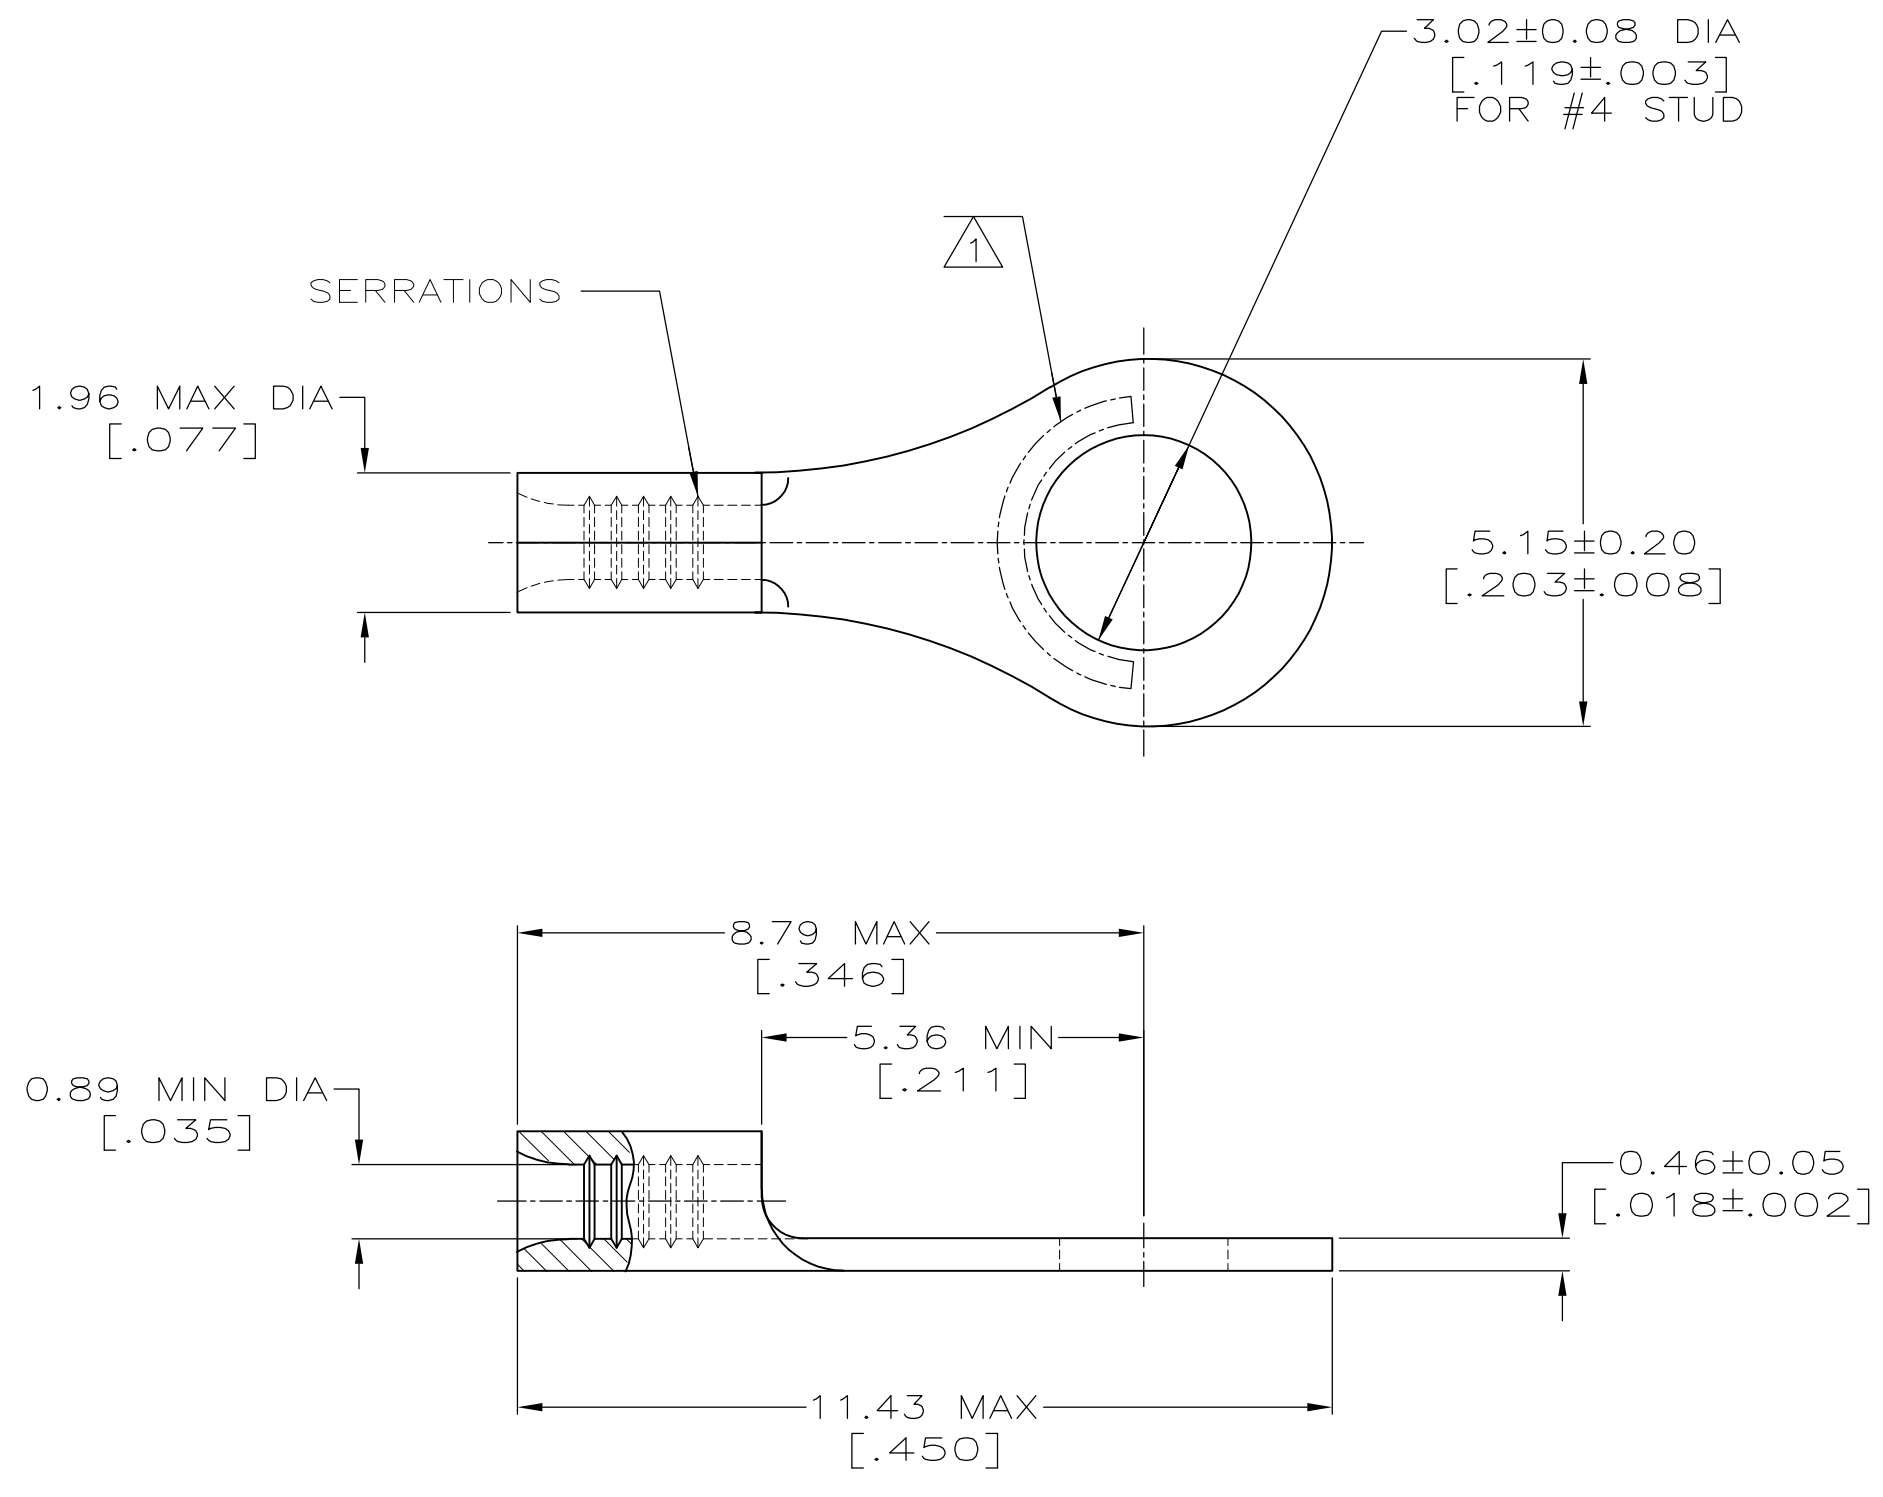

| | | |
|--|--|---|
| AMP INCORPORATED CUSTOMER SERVICE SYSTEMS | | MAX RECOMMENDED OPERATING TEMPERATURE: 170° C MAX |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER 1-800-522-6752 | VOLTAGE RATING: NOT APPLICABLE |
| FOR APPLICATION TOOLING INFORMATION | TOOLING ASSISTANCE CENTER 1-800-722-1111 | WIRE CROSS SECTIONAL AREA RANGE: 0.1-0.41mm ² [202-810] CIR MILS STRANDED |
| FOR ORDER ENTRY | 1-800-526-5142 | |

| | | |
|--|--|---------|
| - | | 31428-1 |
| 0.00254 [.000100] MIN TIN PER ASTM B-545 | | 31428 |
| FINISH | | PART NO |

| | | | | | | | | | | | | | | | | | | | | |
|--|-------------|-------------------------------|--------------------|---|---|-------|---|---|-------|---|---|-------|---|---|-------|---|---|--------|---|-----|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN TA BRINKMAN 2-2-93 | TE Connectivity | | | | | | | | | | | | | | | | | |
| DIMENSIONS: mm [INCHES] | | CHK DA PATTERSON 2-2-93 | | | | | | | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD DE MILLER 2-2-93 | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>± -</td></tr> </table> | | 0 PLC | | ± | - | 1 PLC | ± | - | 2 PLC | ± | - | 3 PLC | ± | - | 4 PLC | ± | - | ANGLES | ± | ± - |
| 0 PLC | ± | - | | | | | | | | | | | | | | | | | | |
| 1 PLC | ± | - | | | | | | | | | | | | | | | | | | |
| 2 PLC | ± | - | | | | | | | | | | | | | | | | | | |
| 3 PLC | ± | - | | | | | | | | | | | | | | | | | | |
| 4 PLC | ± | - | | | | | | | | | | | | | | | | | | |
| ANGLES | ± | ± - | | | | | | | | | | | | | | | | | | |
| MATERIAL COPPER PER ASTM B-152 ANNEALED | FINISH - | WEIGHT - | SIZE A2 | | | | | | | | | | | | | | | | | |
| CUSTOMER DRAWING | | DRAWING NO 00779 | RESTRICTED TO - | | | | | | | | | | | | | | | | | |
| | | SCALE 10:1 | SHEET 1 OF 1 | | | | | | | | | | | | | | | | | |
| | | REV D2 | | | | | | | | | | | | | | | | | | |