


INTERLOCKING TYPE


Connection is disengaged by releasing the locking arm provided in the housing.

Structure

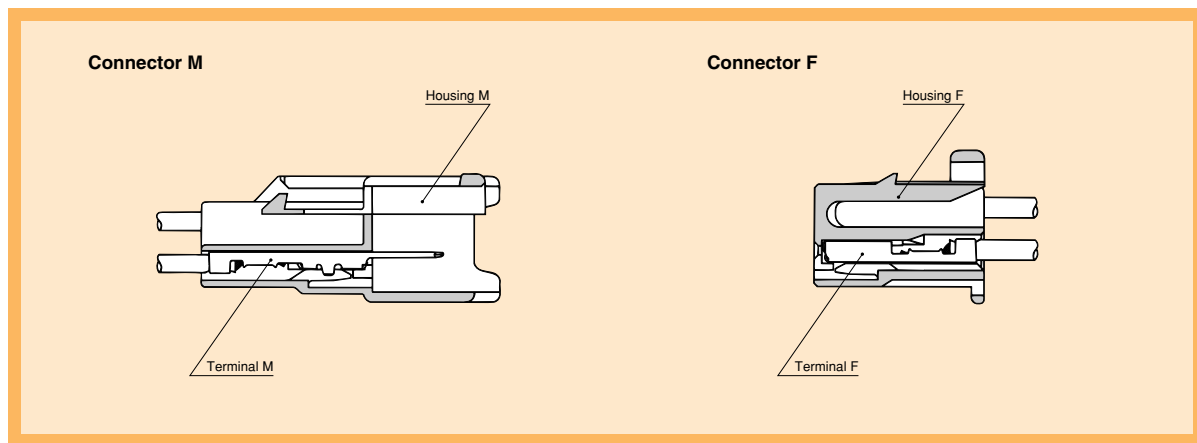


Terminal (UNIT: mm)

Cable size (mm ²)	0.2~0.5
Cable overall diameter (mm)	1.5~2.0
Material	Brass
Surface treatment	Gold-plated
Reel (piece)	5000
Thickness (mm)	0.3




M(8230-4419)

Cable size (mm ²)	0.2~0.5
Cable overall diameter (mm)	1.5~2.0
Material	Brass
Surface treatment	Gold-plated
Reel (piece)	5000
Thickness (mm)	0.25




F(8240-4849)

Cable size (mm ²)	0.2~0.5
Cable overall diameter (mm)	1.5~2.0
Material	Brass
Surface treatment	Tin-plated
Reel (piece)	5000
Thickness (mm)	0.3




M(8230-4272)

Cable size (mm ²)	0.2~0.5
Cable overall diameter (mm)	1.5~2.0
Material	Brass
Surface treatment	Tin-plated
Reel (piece)	5000
Thickness (mm)	0.25




F(8240-4412)

Cable size (mm ²)	0.5~1.25
Cable overall diameter (mm)	1.6~2.9
Material	Brass
Surface treatment	Tin-plated
Reel (piece)	5000
Thickness (mm)	0.3




M(8230-4282)

Cable size (mm ²)	0.5~1.25
Cable overall diameter (mm)	1.6~2.5
Material	Brass
Surface treatment	Tin-plated
Reel (piece)	5000
Thickness (mm)	0.25




F(8240-4422)

Cable size (mm ²)	2.0 (Cables to be used shall be AVSS.)
Cable overall diameter (mm)	2.6
Material	Brass
Surface treatment	Tin-plated
Reel (piece)	5000
Thickness (mm)	0.3



M(8230-4392)

Cable size (mm ²)	2.0 (Cables to be used shall be AVSS.)
Cable overall diameter (mm)	2.6
Material	Heat-resistant copper alloy
Surface treatment	Tin-plated
Reel (piece)	5000
Thickness (mm)	0.25



F(8240-4652)

090