


## Sealed Micro-Quadlock-System (MQS) Connectors . . . For Wire To Device Applications (Continued)

### Plug Housings

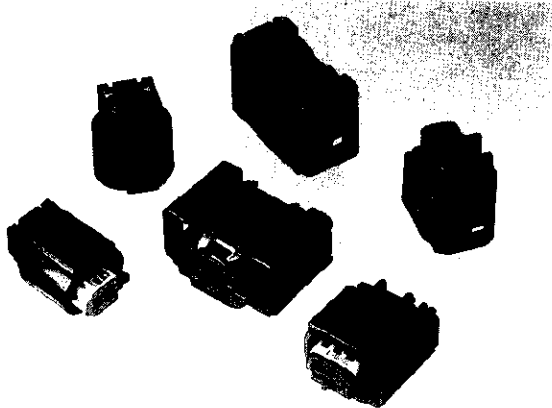


Connector housings are made from PBT material with a silicon rubber interface seal

Positions	Keying Option	Housing Color	Part Number
2	A	Black	1-967644-1
	B	Gray	2-967644-1
3	A	Black	1-967642-1
	B	Gray	2-967642-1
4	A	Black	1-967640-1
	B	Gray	2-967640-1
6	A	Black	1-967616-1
	B	Gray	2-967616-1
8	A or B	See Note	
12	A or B	See Note	

**Note:** Part numbers for the 8 and 12 position versions are not yet released, contact AMP Incorporated for current product status.

### Receptacle Contacts and Wire Seals

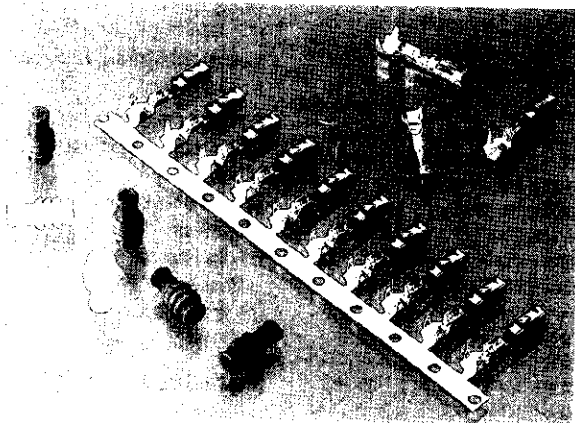

Contacts available in strip form only. Wire seals and cavity plugs are made from silicon rubber.

Wire Range mm <sup>2</sup> / AWG	Insulation Diameter mm/Inches	Wire Seal Part Number	Contact Finish	Contact Part Number
0.2-0.5 [#24-20]	0.9-1.4 [.035-.055]	967067-2	Pre-Tin	962885-X
	1.4-1.9 [.055-.075]	967067-1	Gold	962885-X
0.75 [#18]	1.4-1.9 [.055-.075]	967067-1	Pre-Tin	965906-X

Use cavity plug part number 967056-1 to seal empty circuit cavities.

X = -1 for tin  
X = -5 for gold

**Note:** All terminal part numbers are located on one table drawing, please order 116-18000-200 when ordering customer drawings.