THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -
© COPYRIGHT copyright_date BY - ALL RIGHTS RESERVED.

LOC	DIST
A1	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B5	ECR-15-012070	13AUG2015	JJH	BK
	B6	ECR-15-017291	02DEC2015	JJH	JP
	B7	SERRATION VIEWS ARE ADDED	19MAY2017	JJH	JP
	B8	ADDED REFERENCE TO SMBT CRIMP HEIGHT	12JAN2018	JP	JP

SECTION A-A
Schnitt A-A



SECTION B-B
Schnitt B-B



WIRE CRIMP
Drahtcrimp



VERSION A

-	-	-	-	-	-	-	-	0.2 - 0.5 FLK	E = 2.2 G = 2.2 D_M = 0.8	H = 3.7 K = 3.8 D_M = 2.0	0.20mm² = 1.13 0.25mm² = 1.15 0.35mm² = 1.19 0.50mm² = 1.26	MQC- Applicator 878426-2	539635-1 WITH DIE: mit Matrize 539744-2	2.5	3.8	6.6	19.5	0.3	8
-	-	-	-	-	-	-	-										
-	-	927839-2	C	-	-	CuSn4	vorverzinnt PRETINNED										
-	-	927839-1	C	-	-	CuFe2											
-	-	-	-	927827-2	C	CuSn4	vorverzinnt PRETINNED	0.5 - 1.0 FLK	E = 2.8 G = 3.0 D_M = 1.1	H = 4.5 K = 4.7 D_M = 2.4	0.5mm² = 1.38 0.75mm² = 1.47 1.0mm² = 1.56	MQC- Applicator 2-541689-2	539733-2 WITH DIE: mit Matrize 734249-0	3	4.2	5.8	19.5	0.4	
-	-	-	-	927827-1	C	CuFe2											
-	-	-	-	927833-5	D	CuFe2	2	>1.0 - 2.5 FLK	E = 3.8 G = 4.1 D_M = 1.6	H = 5.7 K = 5.8 D_M = 3.6	1.5mm² = 1.76 2.0mm² = 1.90 2.5mm² = 2.04	MQC- Applicator 878367-2	539635-1 WITH DIE: mit Matrize 539733-2	3.5	4.7	6.3	19.5	0.4	
-	-	-	-	927833-2	D	CuSn4	vorverzinnt PRETINNED										
-	-	-	-	927833-1	D	CuFe2											
927824-2	C	-	-	-	-	CuSn4	vorverzinnt PRETINNED	>2.5 - 4.0 FLK	E = 4.6 G = 4.8 D_M = 2.4	H = 6.3 K = 6.6 D_M = 4.0	3.0mm² = 2.13 3.5mm² = 2.24 4.0mm² = 2.35	MQC- Applicator 2-878314-2	539635-1 WITH DIE: mit Matrize 539734-2	4	5.2	6.8	19.5	0.6	
927824-1	C	-	-	-	-	CuFe2											
B8 11 963709-5	C	-	-	-	-	CuFe2	vorversilbert PRESILVERED 2	4.0 - 6.0 FLK	E = 5.2 G = 5.5 D_M = 2.9	H = 7.3 K = 7.6 D_M = 4.5	4.0mm² = 2.17 5.0mm² = 2.36 6.0mm² = 2.55	MQC- Applicator 2-878738-2	-	4.2	5.6	7.7	20 20.4	0.6	
-	-	-	-	-	-	-	-										
B8 12 963709-2	C	-	-	-	-	CuSn4	vorverzinnt PRETINNED										
B8 13 963709-1	C	-		-	-	CuFe2											
-	-	-	-	-	-	-	-										
1241818-5	B	-	-	-	-	CuFe2	2 vorverzinnt PRETINNED	0.2 - 0.5 FLR	E = 2.2 G = 2.2 D_M = 0.8	H = 2.8 K = 2.8 D_M = 1.4	0.2mm² = 1.13 0.35mm² = 1.19 0.5mm² = 1.26	MQC- Applicator 878427-2	-	2.5	3.8	6.4	19.5	0.3	8
1241818-1	B	-	-	-	-	CuFe2											
-	-	927840-5	C	-	-	CuFe2	vorversilbert PRESILVERED 2	0.5 - 1.0 FLR	E = 2.8 G = 3.0 D_M = 1.1	H = 3.9 K = 4.1 D_M = 1.8	0.5mm² = 1.43 0.75mm² = 1.52 1.0mm² = 1.61	MQC- Applicator 878328-2	169400-0 WITH DIE: mit Matrize 734781-1	3	4.2	5.8	19.5	0.4	
-	-	927840-4	C	-	-	CuSn4											
-	-	-	-	-	-	-	-										
-	-	927840-2	C	-	-	CuSn4	vorverzinnt PRETINNED 2	>1.0 - 2.5 FLR	E = 3.8 G = 4.1 D_M = 1.6	H = 4.8 K = 4.9 D_M = 2.6	1.25mm² = 1.69 1.5mm² = 1.76 2.0mm² = 1.90 2.5mm² = 2.04	MQC- Applicator 878356-2	169400-0 WITH DIE: mit Matrize 734251-0	3.5	4.7	6.3	19.5	0.4	
-	-	927840-1	C	-	-	CuFe2											
-	-	-	-	1-927831-5	C	CuFe2	1	>2.5 - 4.0 FLR	E = 4.6 G = 4.8 D_M = 2.4	H = 5.5 K = 5.7 D_M = 3.3	3.0mm² = 2.13 3.5mm² = 2.24 4.0mm² = 2.35	MQC- Applicator 2-878384-2	169400-0 WITH DIE: mit Matrize 734251-0	4	5.2	6.8	19.5	0.6	
-	-	-	-	927831-5	C	CuFe2	vorversilbert PRESILVERED										
-	-	-	-	927831-4	C	CuSn4											
-	-	-	-	-	-	-	-										
-	-	-	-	927831-2	C	CuSn4	vorverzinnt PRETINNED										
-	-	-	-	927831-1	C	CuFe2											
-	-	-	-	1-927837-5	D	CuFe2	1										
-	-	-	-	927837-6	D	CuFe2	4										
-	-	-	-	927837-5	D	CuFe2	vorversilbert PRESILVERED 2										
-	-	-	-	927837-4	D	CuSn4											
-	-	-	-	-	-	-	-										
-	-	-	-	927837-2	D	CuSn4	vorverzinnt PRETINNED										
-	-	-	-	927837-1	D	CuFe2											
1-927829-5	D	-	-	-	-	CuFe2	1										
927829-5	D	-	-	-	-	CuFe2	2										
927829-2	D	-	-	-	-	CuSn4	vorverzinnt PRETINNED										
927829-1	D	-	-	-	-	CuFe2											

VERSION B

-	-	-	-	2-927836-2	C	CuSn4	5	0.5 - 1.0 FLR	E = 2.8 G = 3.0 D_M = 1.1	H = 7.6 K = 7.7 D_M = 5.6	0.5mm² = 1.43 0.75mm² = 1.52 1.0mm² = 1.61	MQC- Applicator 878337-2	539635-1 WITH DIE: mit Matrize 739736-2	3	5.4	7.2	20	1.25	963243-1 963244-1	100132-1
-	-	-	-	-	-	-	-													
-	-	-	-	927836-2	C	CuSn4	vorverzinnt PRETINNED	>1.0 - 2.5 FLR	E = 3.8 G = 4.1 D_M = 1.6	H = 7.6 K = 7.7 D_M = 5.6	1.5mm² = 1.76 2.0mm² = 1.90 2.5mm² = 2.04	MQC- Applicator 878338-2	539635-1 WITH DIE: mit Matrize 539736-2	3.5	5.9	7.7	20	1.25	963244-1 963245-1	100132-1
-	-	-	-	927836-1	C	CuFe2														
-	-	-	-	2-927835-2	C	CuSn4	5													
-	-	-	-	2-927835-1	C	CuSn4	6													
-	-	-	-	1-927835-3	C	CuFe2	6													
-	-	-	-	-	-	-	-													
-	-	-	-	927835-2	C	CuSn4	vorverzinnt PRETINNED	>2.5 - 4.0 FLR	E = 4.6 G = 4.8 D_M = 2.4	H = 7.6 K = 7.7 D_M = 5.6	3.0mm² = 2.13 - 4.0mm² = 2.35	MQC- Applicator 878441-2	539635-1 WITH DIE: mit Matrize 539736-2	4	5.9	7.7	20	1.25	963245-1	100132-1
-	-	-	-	927835-1	C	CuFe2														
2-928966-2	D	-	-	-	-	CuSn4	5													
2-928966-1	D	-	-	-	-	CuSn4	6													
1-928966-3	D	-	-	-	-	CuFe2	6													
-	-	-	-	-	-	-	-													
928966-2	D	-	-	-	-	CuSn4	vorverzinnt PRETINNED	>3.0 - 5.0 FLR	E = 4.8 G = 5.2 D_M = 2.5	H = 8.15 K = 7.8 D_M = 6.0	3.0mm² = 2.25 4.0mm² = 2.50 5.0mm² = 2.75	MQC- Applicator -	539635-1 WITH DIE: mit Matrize -	4	5.9	7.7	20	1.25	967011-1 963245-1	100132-1
928966-1	D	-	-	-	-	CuFe2														
1241962-1	B	-	-	-	-	CuFe2	vorverzinnt PRETINNED													
TE Connectivity ORDER - NO STRIP FORM Bandware (SERRATION DESIGN - 1)	REV	TE Connectivity ORDER - NO STRIP FORM Bandware (SERRATION DESIGN - 2)	REV	TE Connectivity ORDER - NO STRIP FORM Bandware (SERRATION DESIGN - 3)	REV	MATERIAL Werkstoff	SURFACE Oberflaeche	DGB WIRE RANGE (mm²)	WIRE CRIMP Drahtcrimp	INSUL-CRIMP Isol - crimp	CRIMP HEIGHT Crimp-Hoehe	APPLICATION TOOL Anschlag-WKZ	HAND TOOL Handzange	A	B	C	D	E	SINGLE WIRE SEAL Einzeldichtung	DEAD END PLUG Blindstopfen
									SRTIP FORM / Bandware											
									CRIMP DIMENSIONS (mm) Crimpabmessungen (mm)			EXTRACTION TOOL Ausdrueckwerkzeug Nr.:726503-1							TE CONNECTIVITY ORDER - No.	

7

1 CONTACT ZONE SELECTIVE
PRE SILVER PLATED MIN 3-4.5 µm
Kontaktzone selektiv
vorversilbert min. 3-4.5 µm

2 CONTACT ZONE SELECTIVE
PRE SILVER PLATED MIN 1-1.5 µm
Kontaktzone selektiv
vorversilbert min. 1-1.5 µm

3 CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL
CONTACT AREA: GOLD PLATED
Kontaktkoerper: gal. verzinnt ueber Nickel
Kontaktzone: vergoldet

4 CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL
CONTACT AREA: SELECTIVE NICKEL PLATED 2-4 µm
Kontaktkoerper: gal. verzinnt ueber Nickel
Kontaktzone: selektiv vernickelt 2-4 µm

5 CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL
TOUCHING AREA TO CANTILEVER SPRING:
SELECTIVE AU PLATED OVER NICKEL
CANTILEVER SPRING: COMPLETELY AU PLATED
Kontaktkoerper: gal. verzinnt ueber Nickel
Anlageflaeche zur Ueberfeder
selektiv Au ueber Ni beschichtet
Ueberfeder: komplett Au beschichtet

6 CONTACT BODY: ELECTRO TIN PLATED OVER NICKEL
TOUCHING AREA TO CANTILEVER SPRING AND CONTACT AREA
SELECTIVE AU PLATED OVER NICKEL
CANTILEVER SPRING: COMPLETELY AU PLATED
Kontaktkoerper: gal. verzinnt ueber Nickel
Anlageflaeche zur Ueberfeder Kontaktzone
selektiv Au ueber Ni beschichtet
Ueberfeder: komplett Au beschichtet

7 PREFORMT ISO-AREA
ONLY FOR PN: 1241962-1
Isoflanken vorgeformt
nur bei PN:1241962-1



SECTION B-B
Schnitt B-B

8 WRAP CRIMP
ONLY FOR PN:927839,927840
928989 AND 928990
Umfassungscrimp
nur bei PN: 927839,927840,928989 und 928990



9 TRANSITION ONLY FOR PN 927827,927828,927829,
927830,927833,927834,927837,AND 927838
Uebergang nur fuer PN 927827,927828,927829,
927830,927833,927834,927837,und 927838

10 1-3 µm Sn28M LAYER FOR HIGHER
TEMPERATURE REQUIREMENTS
1-3 µm Sn28M Schicht fuer hoehere
Temperaturanforderungen

11 DOTTED LINE IS ALTERNATIVE SHAPE
Gestrichelte Linie alternative Form

12 OBSOLETE

B8 13 SEE APPLICATION SPEC. FOR PREFERRED STANDARD TO MEET NEW REQUIREMENT
@LV214-2 SLOW MOTION BENDING TEST
Siehe Verarbeitungs Spezifikation fuer bevorzugten Standard um den neuen
Anforderungen der LV214-2 Slow Motion Pruefung zu genuegen

VERSION A
(UNSEALED / ungedichtet)

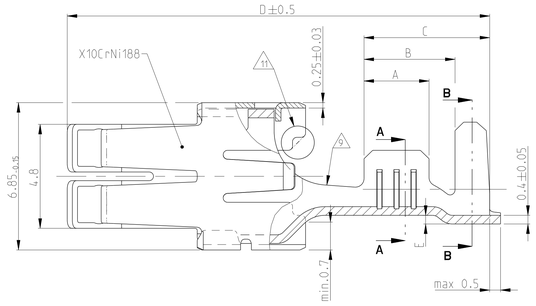

SERRATION DESIGN - 1



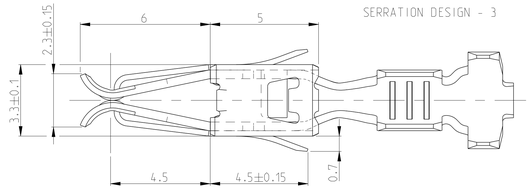

SERRATION DESIGN - 3

SERRATION DESIGN - 2



VERSION B
(SINGLE WIRE SEAL / Einzel-Dichtungs-System)

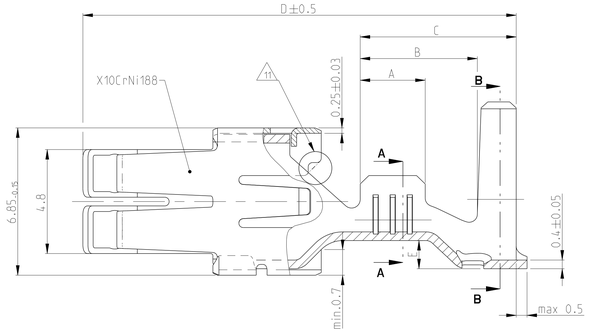

SERRATION DESIGN - 3

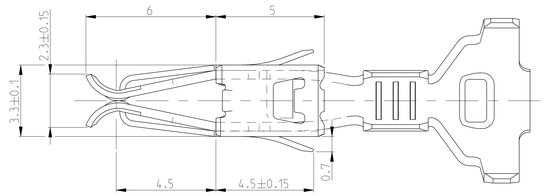

SERRATION DESIGN - 1



THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN M.PFEILSCHIFTER 06APR2011	TE Connectivity	
	CHK W.HUHN 17MAY2000		
DIMENSIONS: mm	APVD M.REICHER 17MAY2000	NAME STANDARD POWER TIMER CONTACT Standard Power Timer Kontakt	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PLC ± 0.2mm; 3 PLC ± 0.1mm; 4 PLC ±; 5 PLC ±; ANGLES ± 2°	PRODUCT SPEC 108-18025		
	APPLICATION SPEC 114-18037	SIZE A0	CAGE CODE 00779
MATERIAL -	WEIGHT -	DRAWING NO © 135504 8	RESTRICTED TO -
FINISH -	CUSTOMER DRAWING	SCALE 10:1	SHEET 1 OF 1
EXTRACTION TOOL 1-1579007-6 968107-1			REV B8