

RELEASED FOR PUBLICATION



ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT - By -

MATED WITH:	LOC	DIST	REVISIONS					
—	AI	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
PROJECT NR.: 87-9187				K11	REVISED PER ECR-12-002298	06FEB2012	Mah	Abele

828921-3	1.9±0.15	OBSOLETED
828921-2	1.5±0.15	OBSOLETED
828921-1	1.5±0.15	
PN	Maß A	

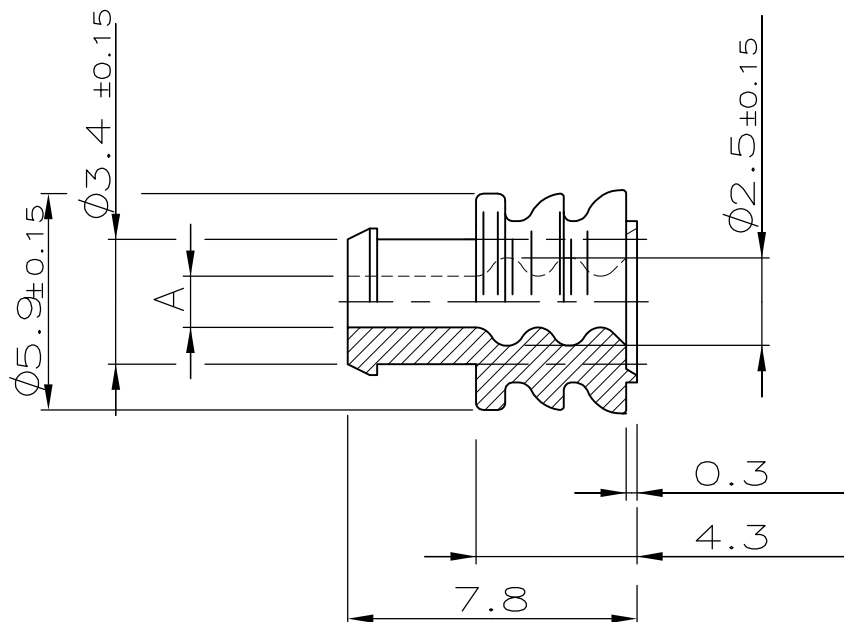

Bemerkungen NOTES

- Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- Passend fuer Drahtgroessenbereich > 1 - 2.5mm²
SUITABLE FOR WIRE SIZE RANGE:
- Passend fuer Isolationsdurchmesser:
SUITABLE FOR INSULATION DIAMETER: 2.1 - 3.0
- Bestueckungshilfe fuer Einzelleiterabdichtung siehe: TE CONNECTIVITY: 965702
INSERTER FOR SINGLE WIRE SEAL SEE :
- Keine Luftloecher zulaessig
NO AIR BUBBLES PERMITTED

(K8)

1 : 1



nur für Handzangen-
verarbeitung / oelfrei
FOR HAND TOOL PROCESS ONLY
OILFREE

DIMENSIONS: mm	DWN	17 APR 97	MATERIAL	—	FINISH	—
	CHK	21 APR 97	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED: p. ISO 2262 p. DIN 16901 - 160	APVD	—				
	PRODUCT SPEC	108-18263-1	NAME 2.5mm System, Einzeldichtung 2.5MM SYSTEM, SINGLE WIRE SEAL			
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APPLICATION SPEC	114-18031	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	WEIGHT	—	A4	00779	C-828921	—
CUSTOMER DRAWING					SCALE	5:1
					SHEET	1 OF 1
					REV	K11