

NUMBER C-175124





METRIC


PRINT DIST. 単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST


AMP-J
REV. 10/83






断面 B-B
SECT. B-B



断面 C-C
SECT. C-C



断面 D-D
SECT. D-D

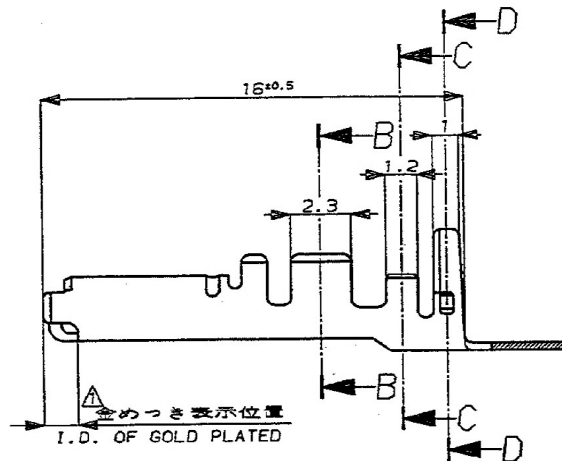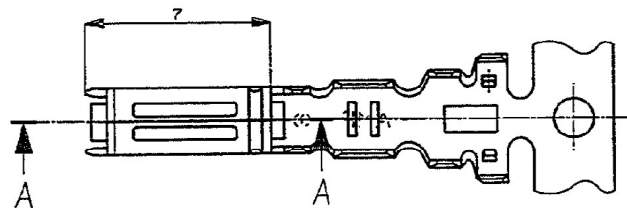

断面 A-A
SECT. A-A

注:
△ 部分金めつき.
2. 圧着規格 114-5134

NOTES:
△ SELECTIVE GOLD
2. CRIMP SPEC. 114-5134

Copyright ©1992年 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright ©1992 AMP (Japan), LTD. ALL RIGHTS RESERVED.		AMP 日本エー・エム・ピー株式会社 Tokyo, Japan	
適合電線断面積 (WIRE RANDED) 0.3-0.56 mm ² (AWG#22-#20)		被覆外径 (INSULATION DIA.) 1.0-1.4 mmφ		名称 (NAME) .070 SERIES RECEPTACLE .070 シリーズ リセプタクルコンタクト	
材料 (MATERIAL) THICKNESS BRASS, 板厚: 0.25		仕上 (FINISH) SEE TABLE 表参照		一般公差 (GENERAL TOLERANCES) 10mm ±0.2 10mm ±0.25 30mm ±0.3 角度 ±3°	
0 作成 (J-1380) 9/12/82 LTR 変更 (REVISION RECORD) DR CHK DATE		DR. 9/12/82 DE. 9/12/82 APP. 9/12/82		寸法 (SCALE) 5-1 REV. 0 SHEET 1 OF 1	
				番号 (No.) C-175124	

(CUSTOMER DRAWING) 参考図面