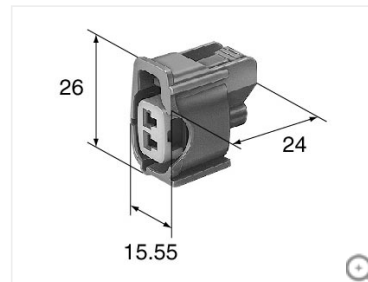


[How to choose connectors](#)[Notes on usage](#)[User Guide](#)[Catalogue PDF](#)

Product information



(Unit: mm)

[3D drawings](#)[Contact us for products](#)

6189-0611

TS sealed series

Housing Inline

2.3mm(090)

Sealed/Unsealed	sealed
Male/Female	F
Way	2





Materials	PBT
Color	Gray

Contact resistance	Initial	3mΩ Max.
	after durability tests	10mΩ Max.
Leak current	100μA Max.	
Insulation resistance	100MΩ Min.	
Seal	Initial	50kPa Min.
	after durability tests	30kPa Min.




Note	P5:For 5mm Pitch housing Please inquire us for the details.
------	--

TS sealed series related products


Terminal (6)

[2.3mm 8100-0460](#)[2.3mm 8100-1344](#)[2.3mm 8100-0461](#)[2.3mm 8100-0594](#)[Show all results](#)

Wire seals (3)

[2.3mm 7165-0342](#)[2.3mm 7165-0343](#)[2.3mm 7165-0344](#)

Dummy plugs (1)

[2.3mm 7161-9787](#)

