



LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			A	REDRAWN PER ECR 05-010490	08SEP05	JR

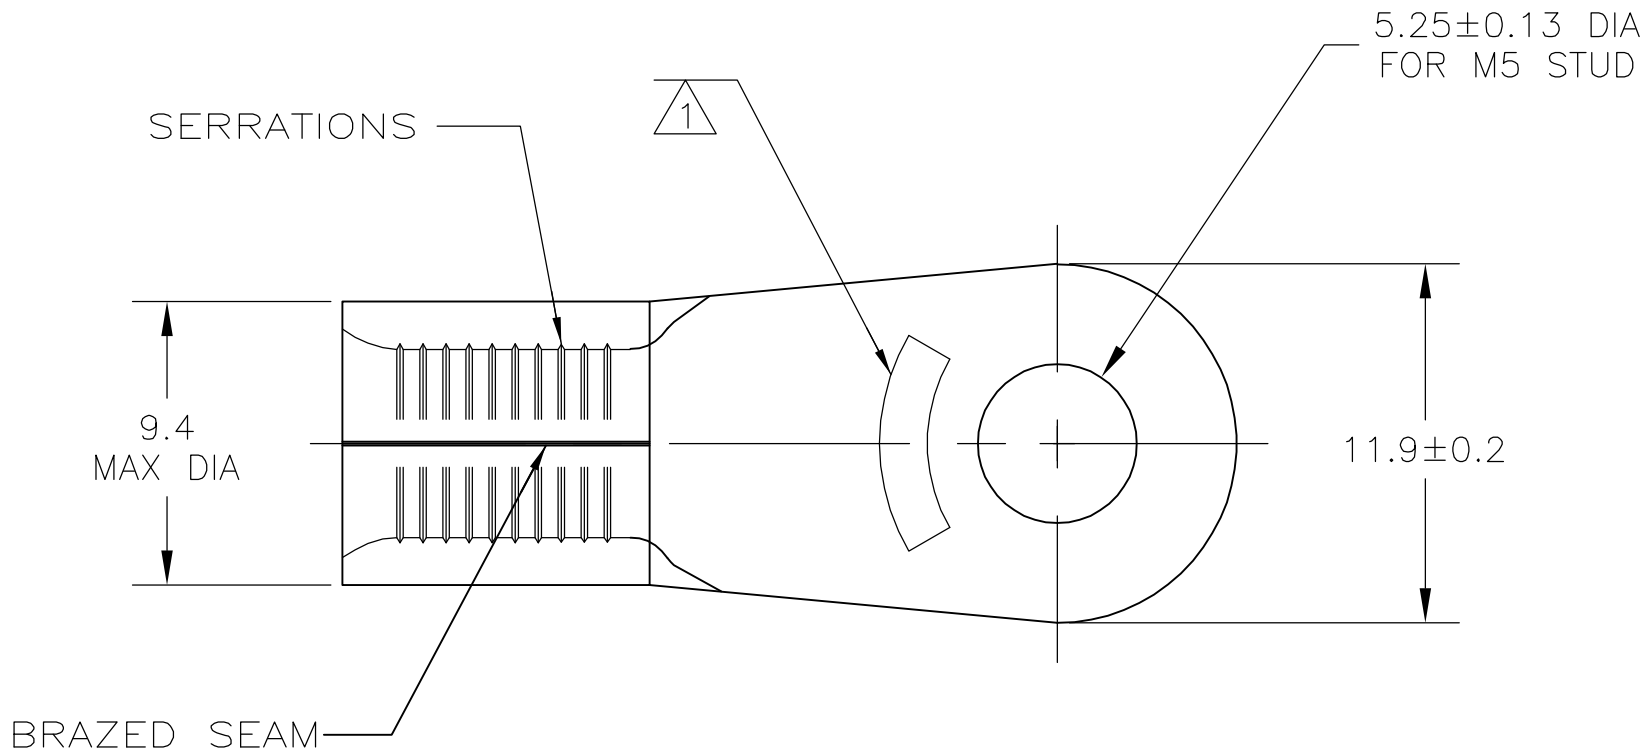

AMP
WIRE RANGE

6 AWG
SOLID OR STRANDED

- 1 STAMP AMP 6* APPROX AS SHOWN
- 2 COPPER PER ASTM B-152, ANNEALED
- 3 MAX OPERATING TEMP IS 170°C
- 4 WIRE CROSS SECTIONAL AREA RANGE:
10.5-16.8mm² [20,800-33,100] CIR MILS
SOLID OR STRANDED WIRE

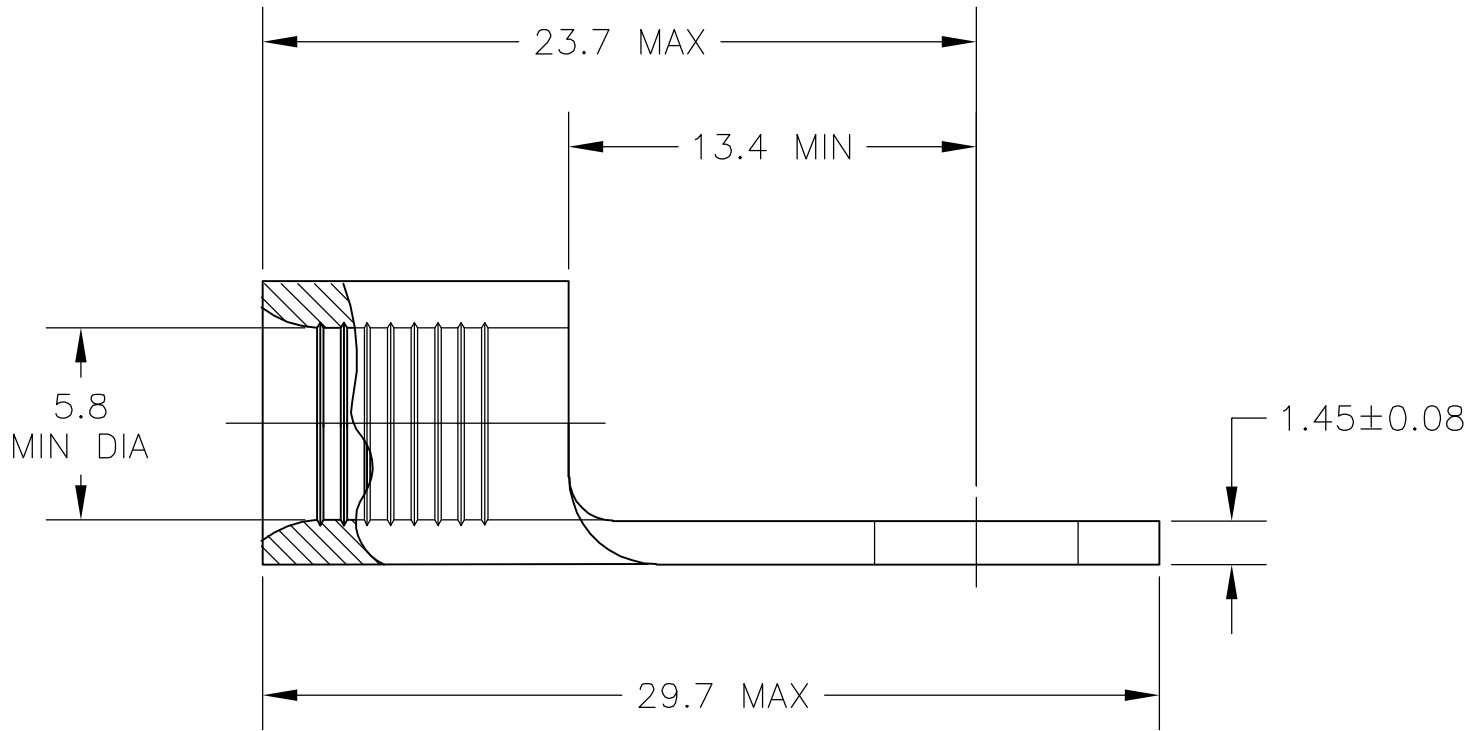

LOOSE PIECE	100	TIN PLATE 0.00254[.000100] MIN THK PER MIL-T-10727	130552
PACKAGE TYPE	QTY	FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH		08SEP05		tyco Electronics				Tyco Electronics Corporation Harrisburg, Pa 17105-3608											
DIMENSIONS: mm INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK T MICHIELUTTI		08SEP05		NAME TERMINAL, RING TONGUE, SOLISTRAND													
		APVD T MICHIELUTTI		08SEP05		PRODUCT SPEC —															
		APPLICATION SPEC —		SIZE A2										CAGE CODE 00779		DRAWING NO C=130552		RESTRICTED TO —			
MATERIAL 		FINISH SEE TABLE		WEIGHT —		CUSTOMER DRAWING										SCALE 4:1		SHEET 1 of 1		REV A	