


THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS:

BACKSHELL KIT INCLUDES:

- (1)BACKSHELL
- (2)4-40 THUMBSCREWS
- (1)PLASTIC STRAIN RELIEF
- (1)METAL STRAIN RELIEF CLAMP
- (2)STRAIN RELIEF SCREWS

TORQUE VALUE ON PLASTIC FOR STRAIN RELIEF SCREWS=4 INCH POUNDS MAX

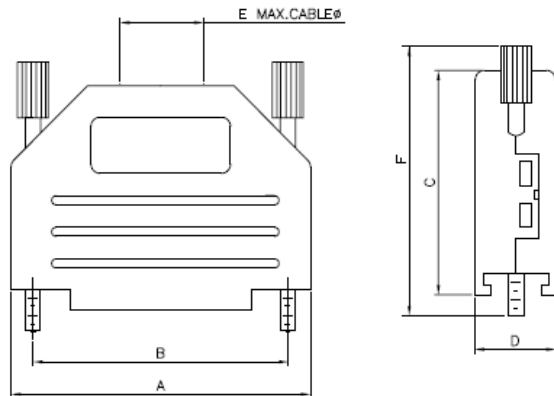

DIMENSIONS(mm/in)						
SIZE	A ± 0.32	B ± 0.12	C ± 0.2	D ± 0.2	E	F ± 0.2
9	31.50 1.240	24.99 0.984	34.00 1.339	15.00 0.591	8.00 0.315	47.20 1.858
15	40.00 1.575	33.32 1.312	34.00 1.339	15.00 0.591	11.50 0.453	47.20 1.858
25	53.50 2.106	47.04 1.852	40.00 1.575	15.00 0.591	11.50 0.453	47.20 1.858
37	71.00 2.795	63.50 2.500	40.00 1.575	15.00 0.591	11.50 0.453	47.20 1.858
50	67.50 2.657	61.11 2.406	40.00 1.575	19.00 0.748	14.00 0.551	47.20 1.858

ORDERING INFORMATION: (YY=COLOR)

SIZE	P/N-KITTED:	P/N-BULK:
9-WAY	MHDPPK9-YY-K	MHDPPK9-YY
15-WAY	MHDPPK15-YY-K	MHDPPK15-YY
25-WAY	MHDPPK25-YY-K	MHDPPK25-YY
37-WAY	MHDPPK37-YY-K	MHDPPK37-YY
50-WAY	MHDPPK50-YY-K	MHDPPK50-YY

COLOR CODE CHART:

BLACK = BK
LIGHT GREY = LG
DEC GREY = DE
RED = R
BLUE = B
YELLOW = Y
GREEN = G
WHITE = W

MATERIAL: POLYAMIDE PA66-UL RECOGNIZED MATERIAL
SEE COLOR CODE CHART.
THUMBSCREWS: STEEL,BLACK OXIDE(FOR BLACK HOODS)
STEEL,Zn PLATED(FOR COLORED HOODS)

OPERATING TEMP: -55°C TO+110°C .

THESE DRAWINGS AND SPECIFICATIONS ARE THE
PROPERTY OF MH CONNECTORS AND SHALL NOT BE
REPRODUCED, COPIED OR USED AS THE BASIS FOR
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT
WRITTEN PERMISSION.

DRAWN HALEY	DATE 04-17-15
APPROVED	DATE
SCALE NTS	SHEET OF 1 OF 1
DRAWING No MHDPPK-SLIM SERIES	REV: E



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.



MH CONNECTORS ,
DIVISION OF EDAC

	COLOUR RANGE	
COLOUR	UPPER	LOWER
01 = BLACK	PANTONE BLACK 3C	PANTONE BLACK 3C
02 = LIGHT GREY	427C	427C
07 = GREEN	7731C	7732C
04 = RED	186C	187C
05 = BLUE	2190C	2191C
06 = YELLOW	108C	109C
03 = DEC GREY	7527C	7534C