

YES Connector Female Housing




7283-5566-60

(Unit:mm)

Configuration diagram

Male Connector

オス コネクタ

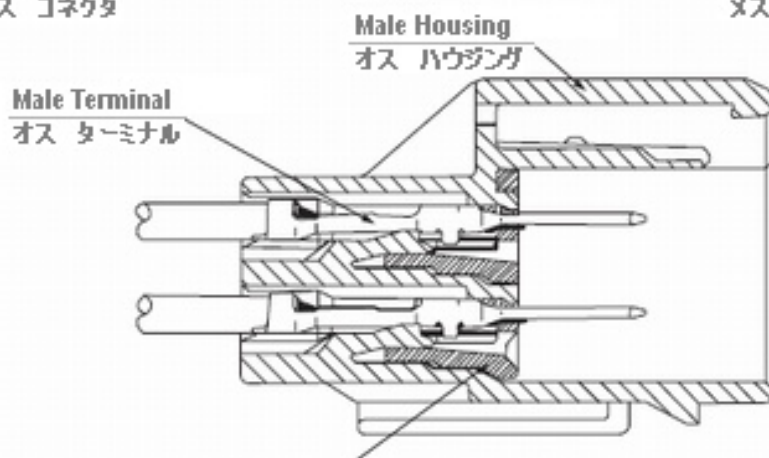


Male Pre-set Secondary Terminal Lock (TPA)

オス側 事前組付け二重係止板

Female Connector

メス コネクタ

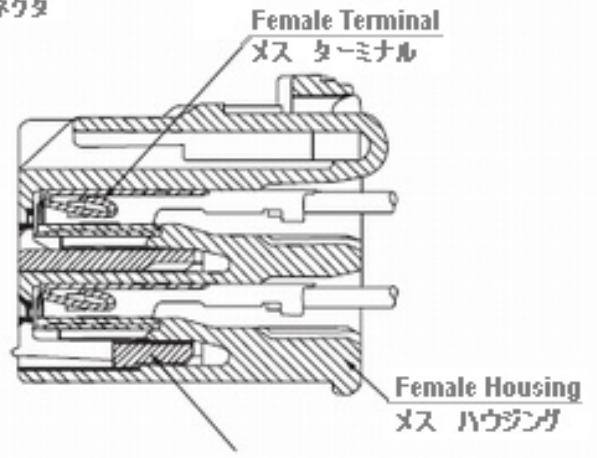

Female Pre-set Secondary Terminal Lock (TPA)

メス側 事前組付け二重係止板

Specifications

Classified Parts	Housing
Family	^{*2} YES/YESC Kaizen Connectors
Type	2.8X0.8
Yazaki Part Number	7283-5566-60
Connection Type	Wire to Wire Wire to Device
Unsealed/Seald	Unsealed
Male/Female	Female
Number of Poles	4
Tab Width mm(inches)	2.8(110)
Material	Heat-resistance Nylon
Plating	-
Color	Green
Rating	-
Mating Part Numbers	7282-5566-60
Product Specification No.	YPES-11-05-105
Instruction Manual No.	YPES-15-366

Product Specification

Allowable Current(Ref.)	20A(Ref)
Low Level Contact Resistance	10milli ohm Max.(Initial)
Insulation Resistance	20Megohm Min.(at 500VDC)
Withstanding Voltage	1000V AC (1min.)
Temperature Range	^{*9} -40 to 100deg.C

Application List of Installable Components

Terminals	Wire Seals	Holders
7116-4110-02	-	-
7116-4111-02	-	
7116-4112-02	-	
7116-4270-02	-	
7116-4271-02	-	
7116-4272-02	-	

^{*3})Heavy Duty Type, ^{*4})Single Pole Type, ^{*5})Material NBR, ^{*6})5mm pitch, ^{*7})5.5mm pitch

^{*8})For installable components for the hybrid series, refer to the related component table.

^{*9})Operating Temperature Range includes temperature rise caused by current flow.

«Note for Purchase»

This brochure includes information on the parts developed jointly with particular customer(s) and approval from the customer(s) may be required for sales.

We would appreciate it if you could contact us prior to purchase.