

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
A1		REVISED PER PCN-22-140611	26MAY2022	AP	IG
A2		REVISED PER PCN-22-145811	11JUL2022	MR	IG
A3		REVISED PER PCN-22-153672	22SEP2022	AM	IG
A4		REVISED PER PCN-22-154549	04OCT2022	AM	IG

FIGURE 1

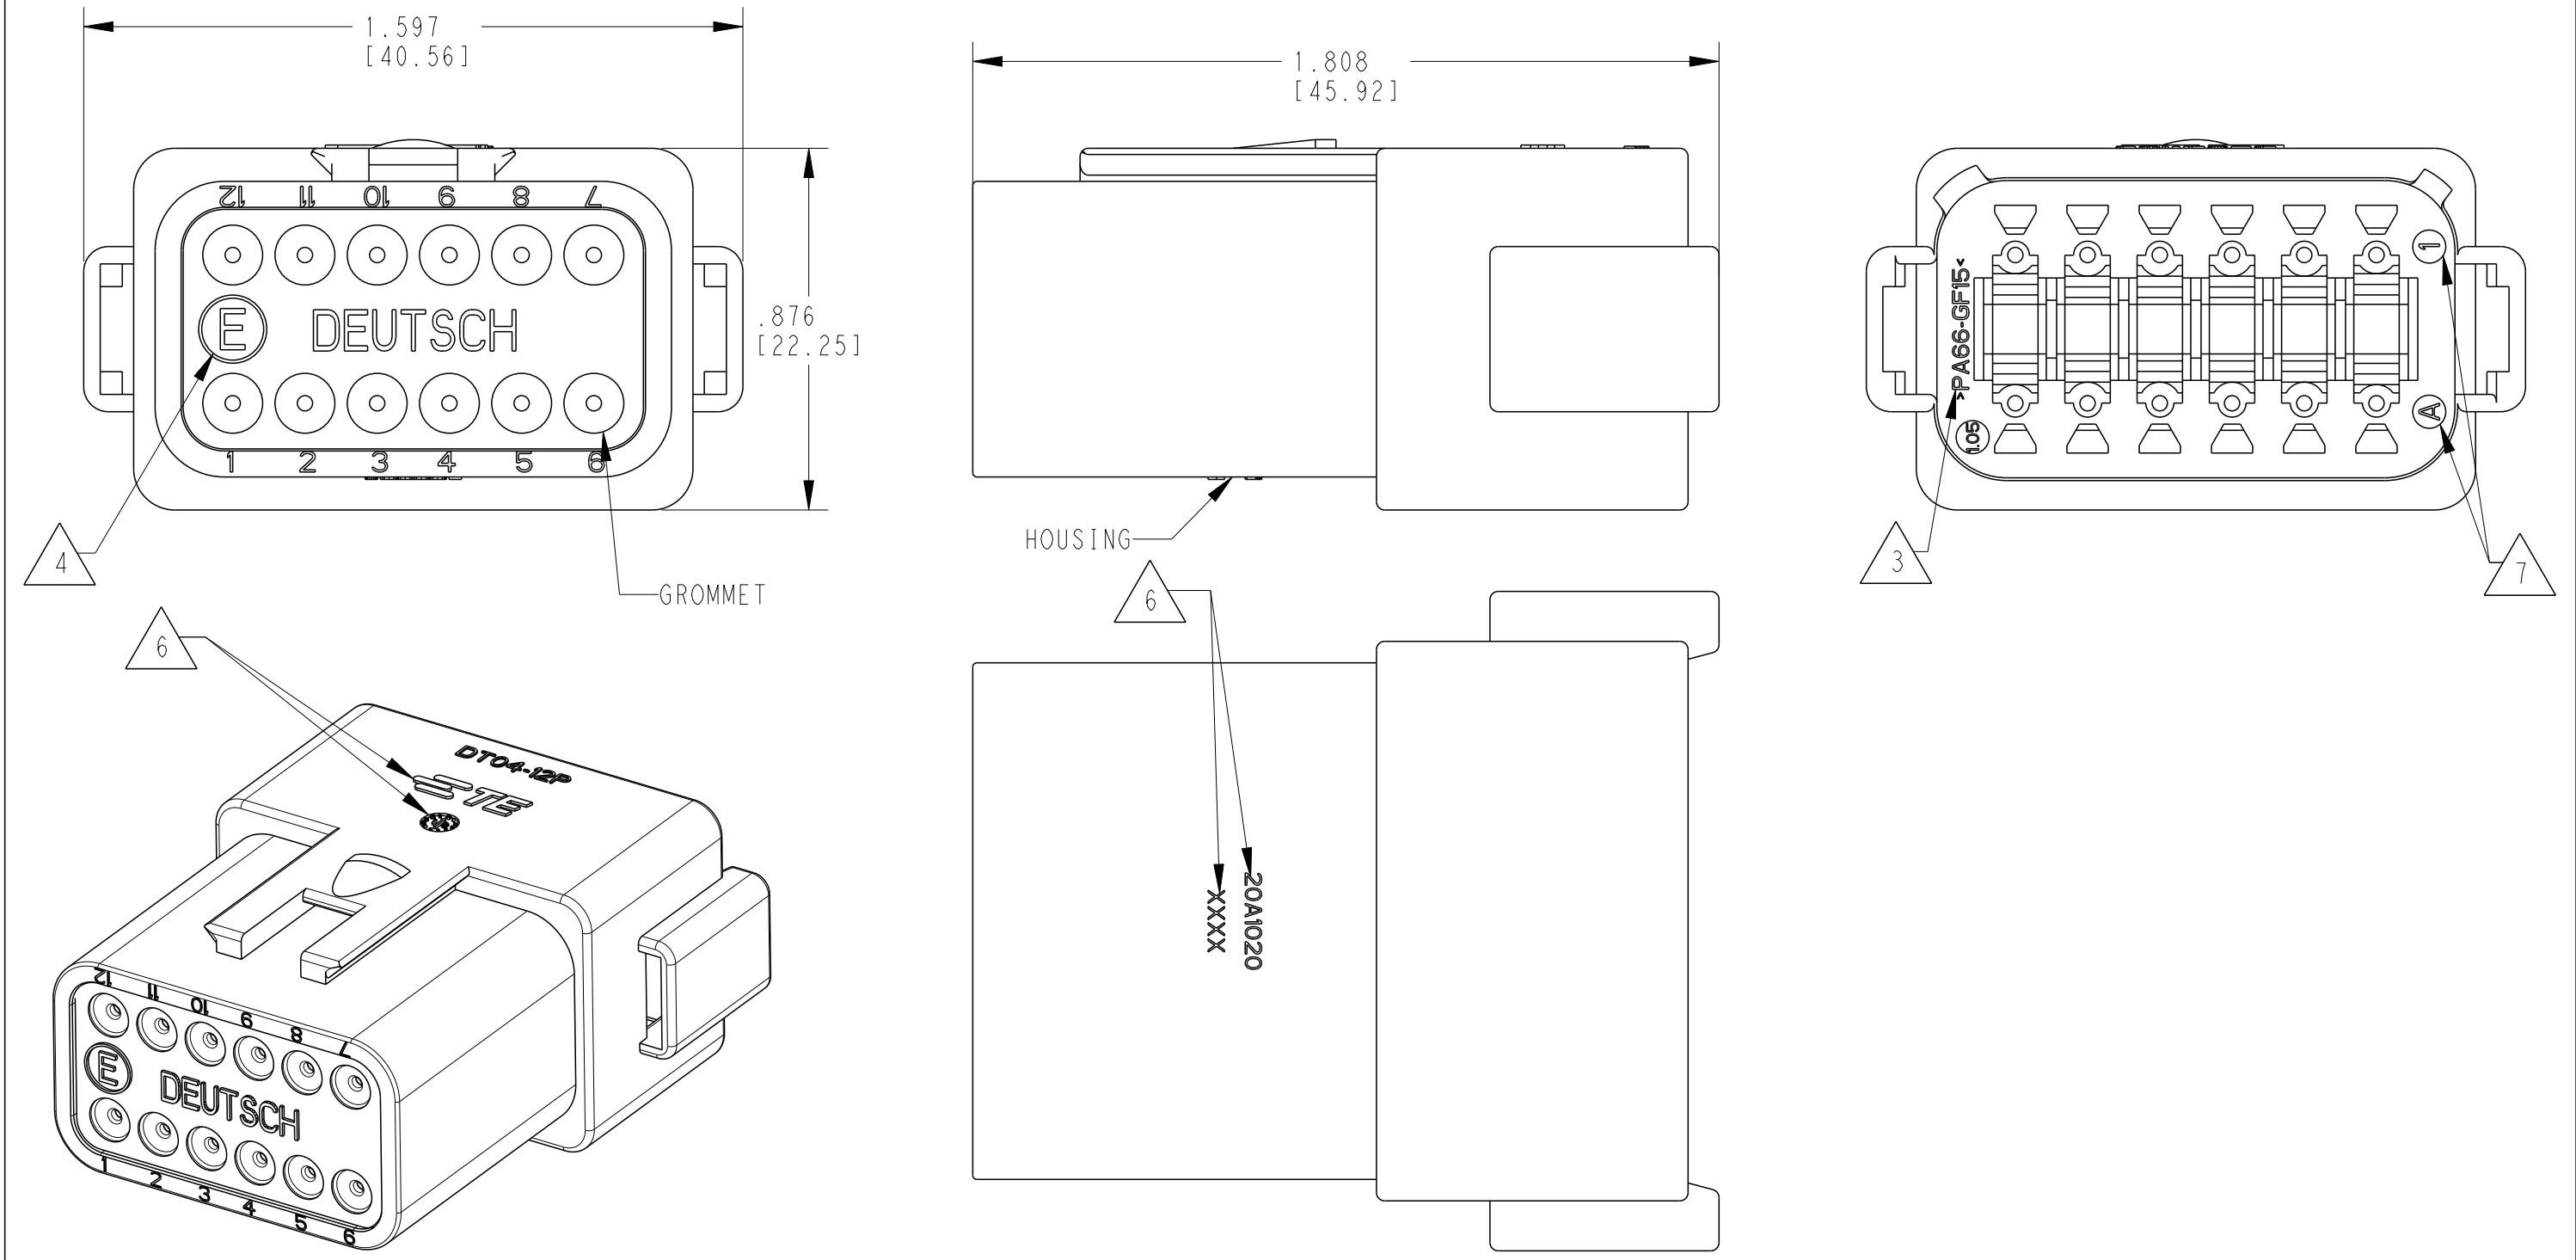


FIGURE 2
SHORT CAP


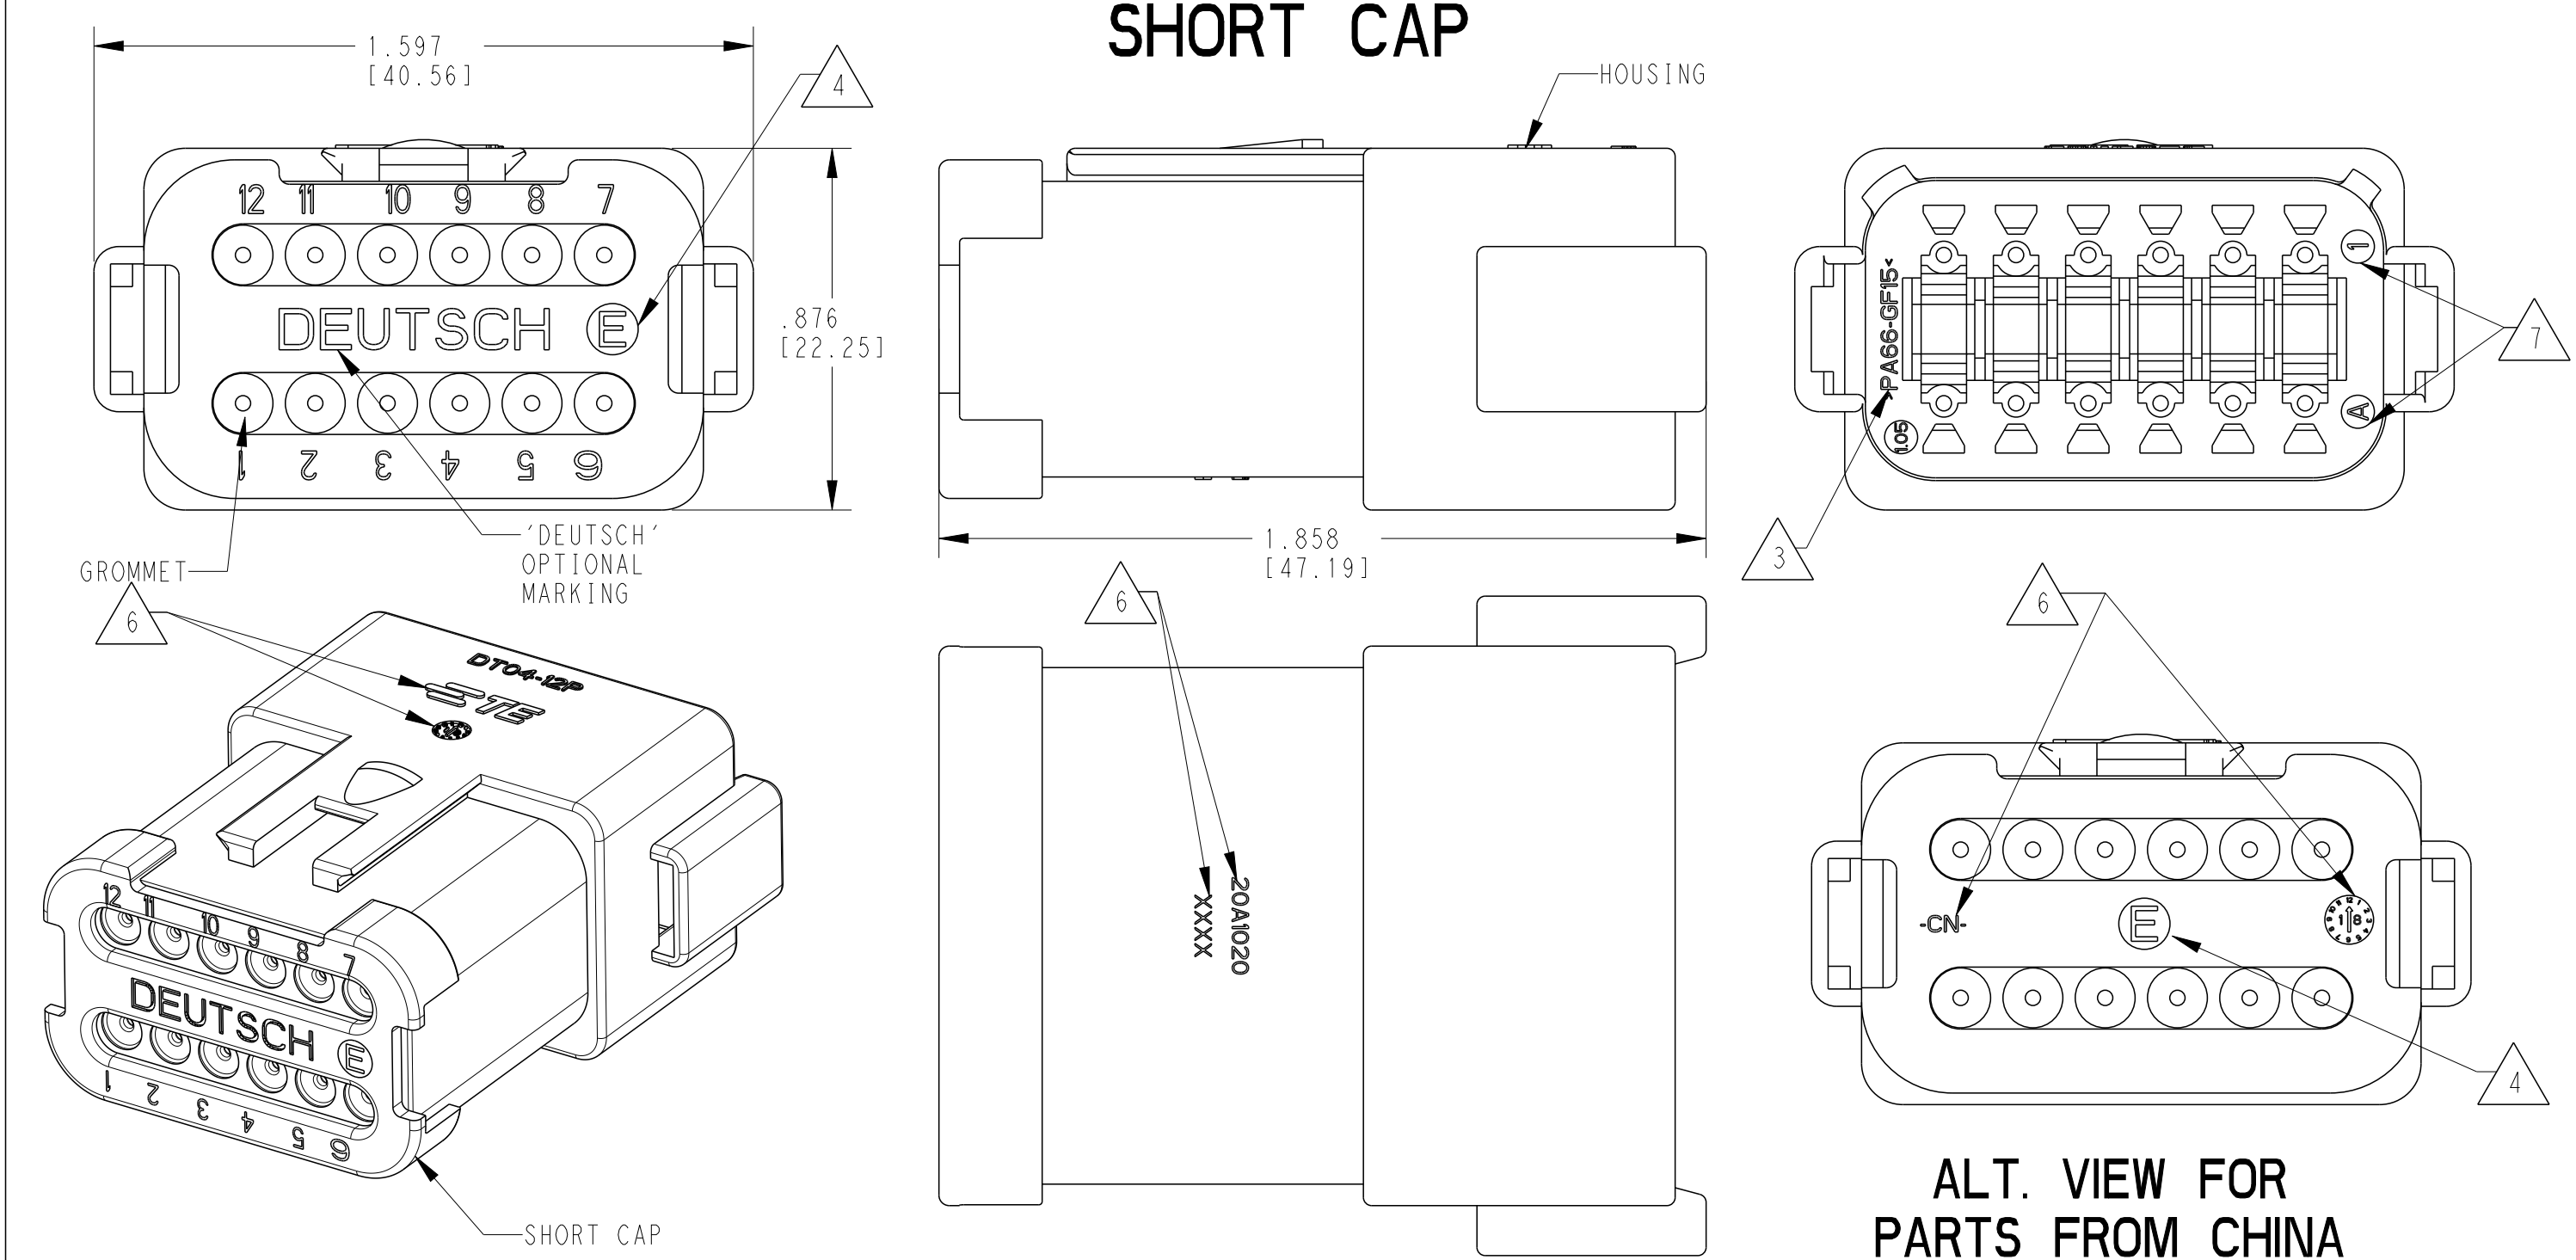


FIGURE 3
LONG CAP

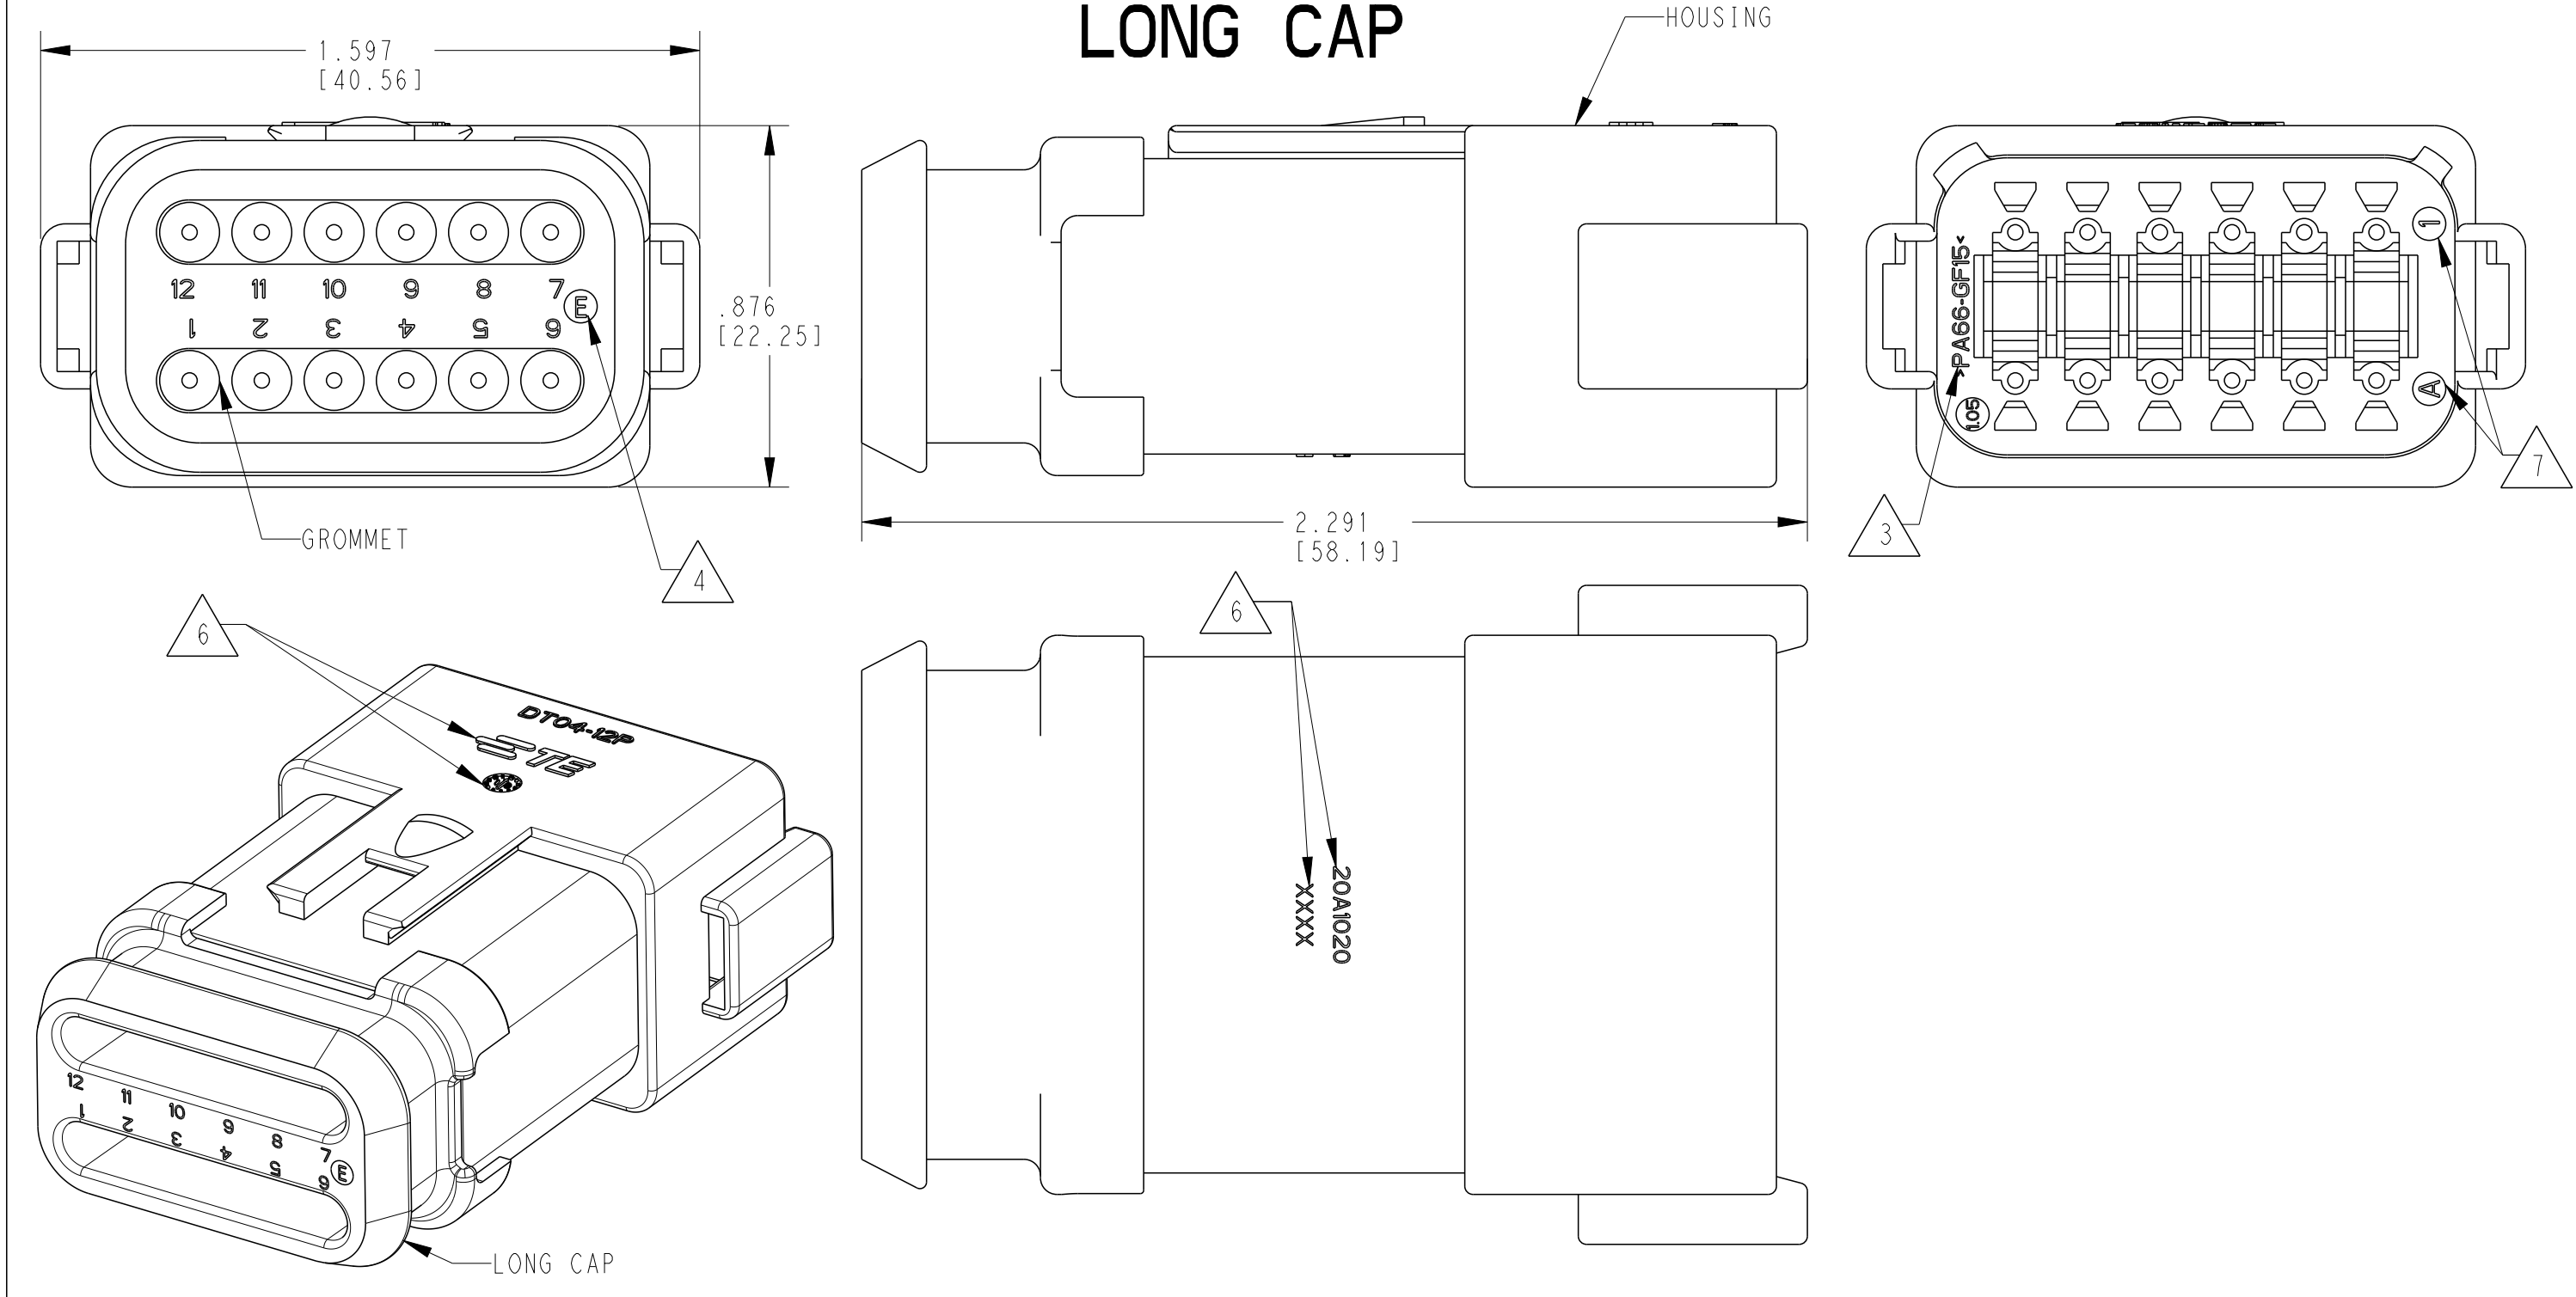

6. MARKING FOR PARTS PRODUCED IN CHINA:

-XXXX IDENTIFIES THE MODIFICATION NUMBER, IF APPLICABLE. EXAMPLE: "E003" FOR DT04-12PA-E003, OR BLANK FOR DT04-12PA

-DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGIT. (17 = 2017)
MONTH: THIRD DIGIT, EXCLUDING 1. A = JAN, B = FEB, C = MARCH ... (K = OCTOBER)
DAY: FOURTH AND FIFTH DIGITS (14 = 14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (11 = 11AM)

-DIAL DATE CODE LOCATED ON HOUSING AND/OR CAP.
-CN LOCATED ON HOUSING AND/OR CAP.

5. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE CUSTOMER DRAWING 0425-015-0000.

7. MARKING FOR PARTS PRODUCED IN US:
-DATE CODE:
YEAR TO BE LAST NUMERICAL DIGIT, EX: 1 = 2021
MONTH UVSES SEQUENTIAL ALPHA CHARACTERS, EX: A = JANUARY
-DEUTSCH

CONTACT SIZE	WIRE RANGE	INSULATION OD SEALING RANGE	SEAL IDENTIFICATION
16	14-20 AWG [2.5-0.5mm ²]	.088-.145 [2.23-3.68] .053-.120 [1.35-3.05]	STANDARD SEAL EXTRA THIN SEAL E-SEAL

TE INTERNAL PART NUMBER	DEUTSCH PART NUMBER	PN REV	COLOR	STANDARD SEAL	EXTRA THIN SEAL E-SEAL	BLOCKED SEAL	ENHANCED KEY	SHORT CAP	LONG CAP	FIGURE
DT04-12PX	DT04-12PX	A	ALL	X						1
DT04-12PX-B016	DT04-12PX-B016	A	ALL	X			X			1
DT04-12PX-BE01	DT04-12PX-BE01	A	ALL	X			X	X		2
DT04-12PX-BE02	DT04-12PX-BE02	A	ALL	X			X	X		2
DT04-12PA-BE03	DT04-12PA-BE03	A	BLACK	X			X	X		2
DT04-12PA-BE04	DT04-12PA-BE04	B	BLACK		X		X	X		2
DT04-12PX-BE07	DT04-12PX-BE07	A	ALL		X		X		X	3
DT04-12PX-C015	DT04-12PX-C015	F	ALL		X					1
DT04-12PX-C017	DT04-12PX-C017	A	ALL			X		X		2
DT04-12PX-CE01	DT04-12PX-CE01	B	ALL		X			X		2
DT04-12PA-CE02	DT04-12PA-CE02	B	BLACK		X					1
DT04-12PA-CE03	DT04-12PA-CE03	B	BLACK		X			X		2
DT04-12PX-CE04	DT04-12PX-CE04	B	ALL		X				X	3
DT04-12PX-CE07	DT04-12PX-CE07	B	ALL		X		X	X		2
DT04-12PX-CE08	DT04-12PX-CE08	B	ALL		X		X			1
DT04-12PA-CE09	DT04-12PA-CE09	B	BLACK		X				X	3
DT04-12PA-CE26	DT04-12PA-CE26	A	BLACK			X		X		2
DT04-12PX-E003	DT04-12PX-E003	B	ALL	X				X		2
DT04-12PA-E004	DT04-12PA-E004	A	BLACK	X						1
DT04-12PA-E005	DT04-12PA-E005	A	BLACK	X				X		2
DT04-12PA-E008	DT04-12PA-E008	A	GRAY	X					X	3
DT04-12PX-EP04	DT04-12PX-EP04	C	ALL	X				X		2
DT04-12PA-EP20	DT04-12PA-EP20	A	GRAY	X			X		X	3
DT04-12PX-P004	DT04-12PX-P004	B	ALL	X						1





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. POLO CHK R. MESSENGER APVD J. GRANTCHAROVA	22DEC2021 22DEC2021 22DEC2021
DIMENSIONS: IN [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 (0.64) 4 PLC ± ANGLES ±0°30'0"	PRODUCT SPEC 108-151009 APPLICATION SPEC 114-151009	NAME 12 WAY RECEPTACLE, STANDARD SEAL EXTRA THIN SEAL, SHORT AND LONG CAP, DT SERIES
MATERIAL 3	WEIGHT	SIZE A11 CAGE CODE 4AFU8 DRAWING NO C=DT04-12PX-XXXX	RESTRICTED TO CUSTOMER DRAWING SCALE 5:2 SHEET 1 OF 3 REV A4

DT04-12PA-XXXX
KEY -A-
COLOR: GRAY
SEE PN TABLE FOR BLACK PN


DT04-12PB-XXXX
KEY -B-
COLOR: BLACK

DT04-12PC-XXXX
KEY -C-
COLOR: GREEN


DT04-12PD-XXXX
KEY -D-
COLOR: BROWN

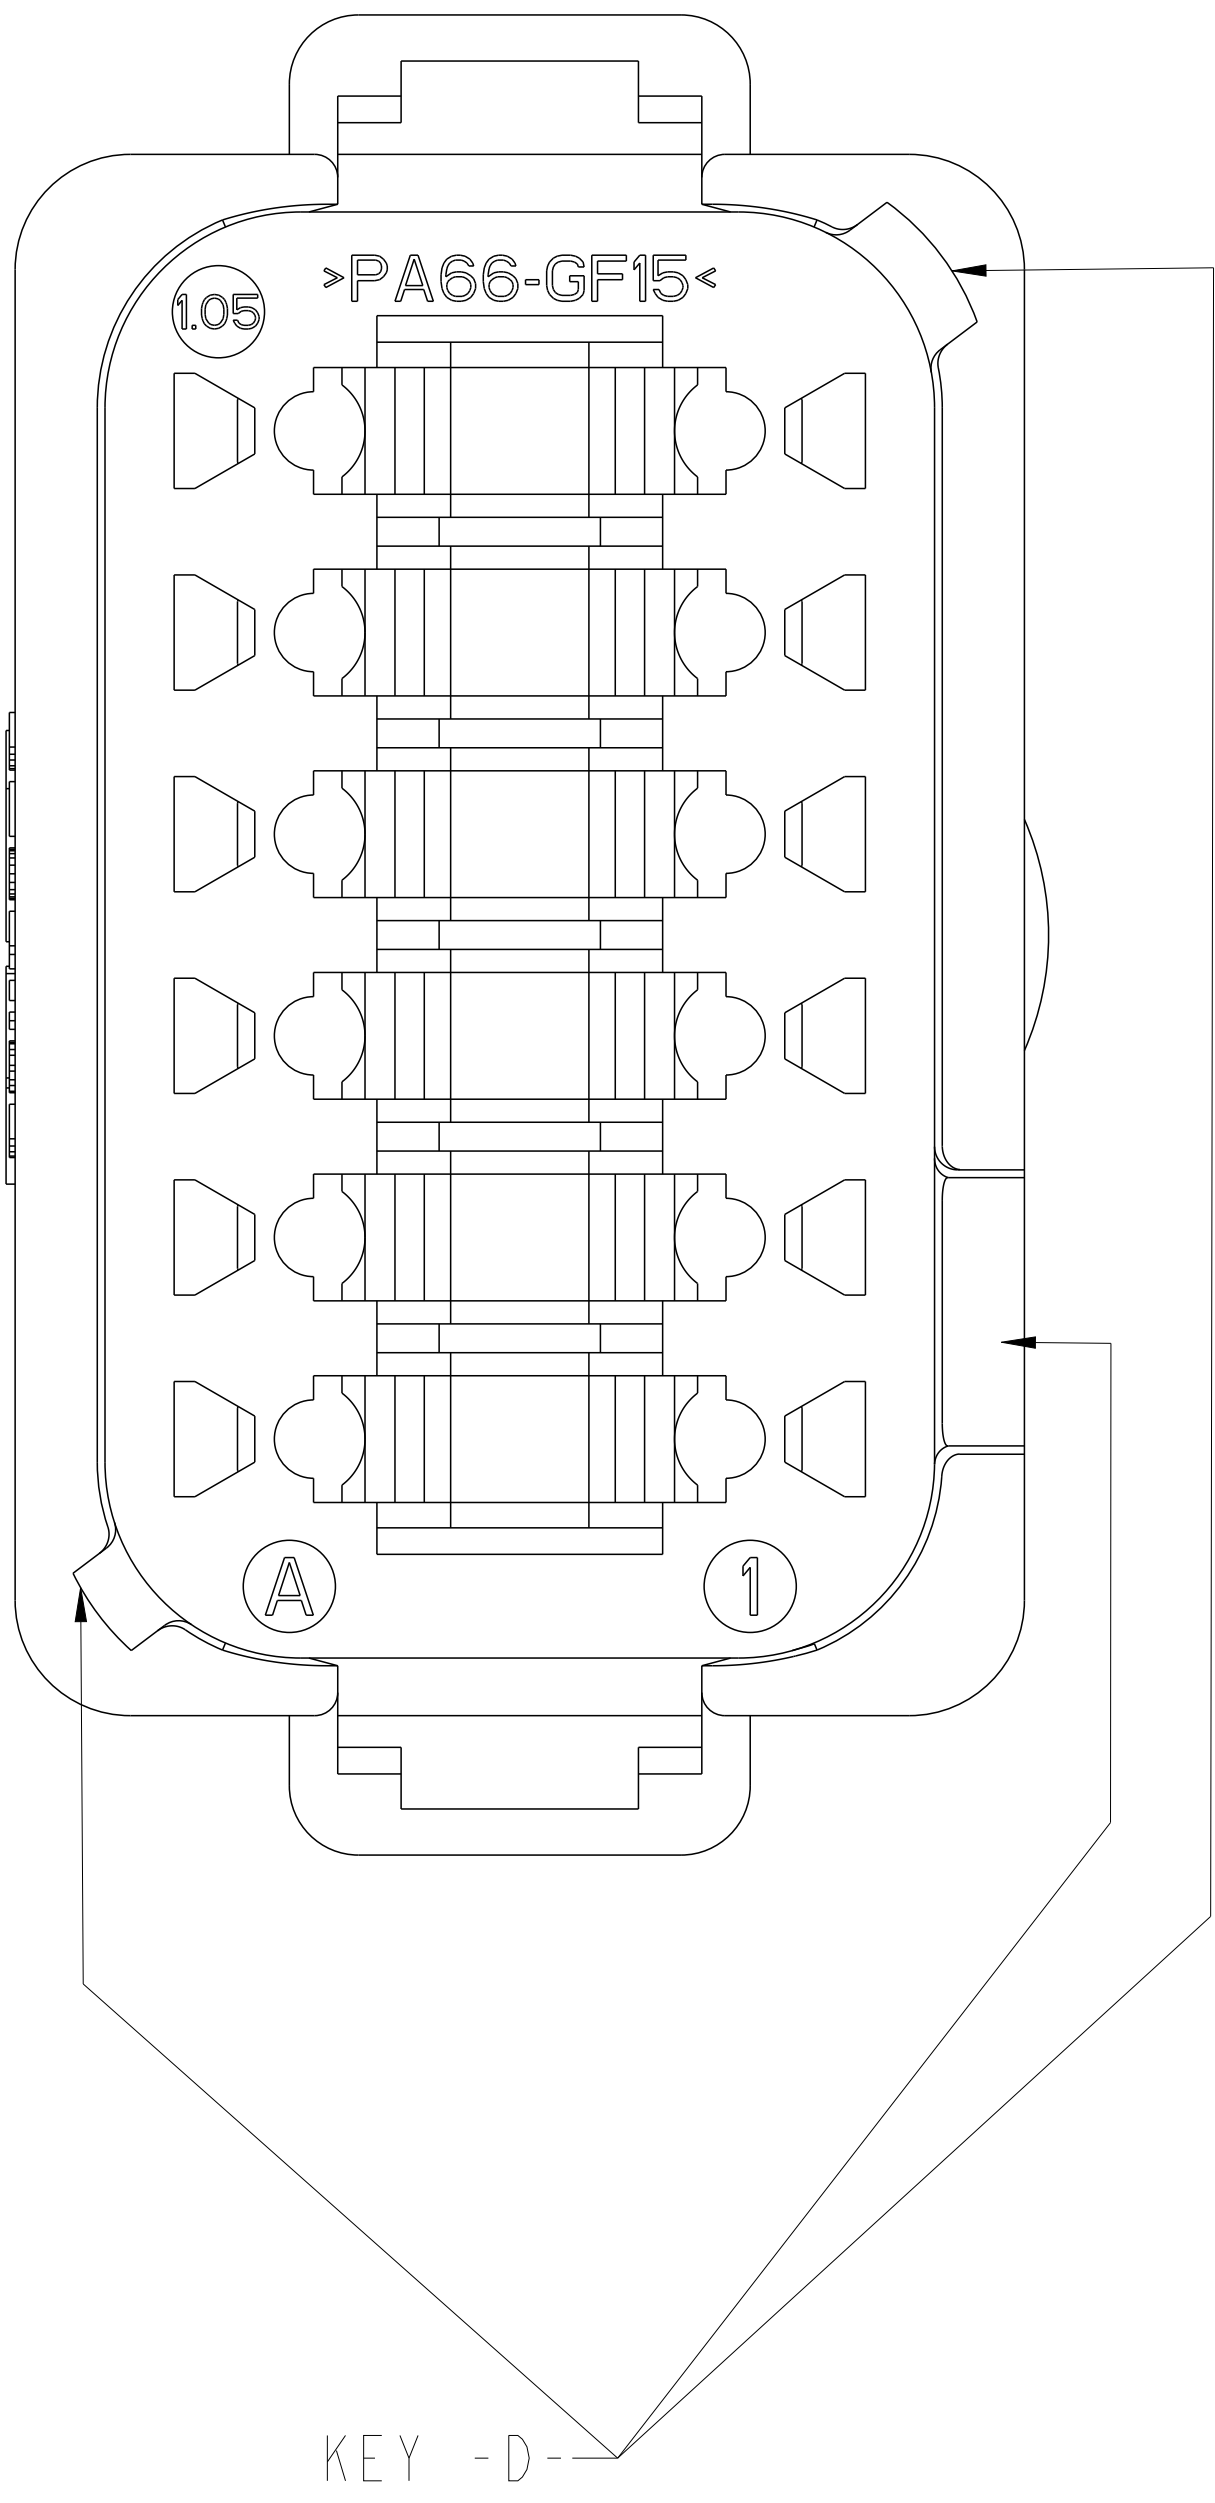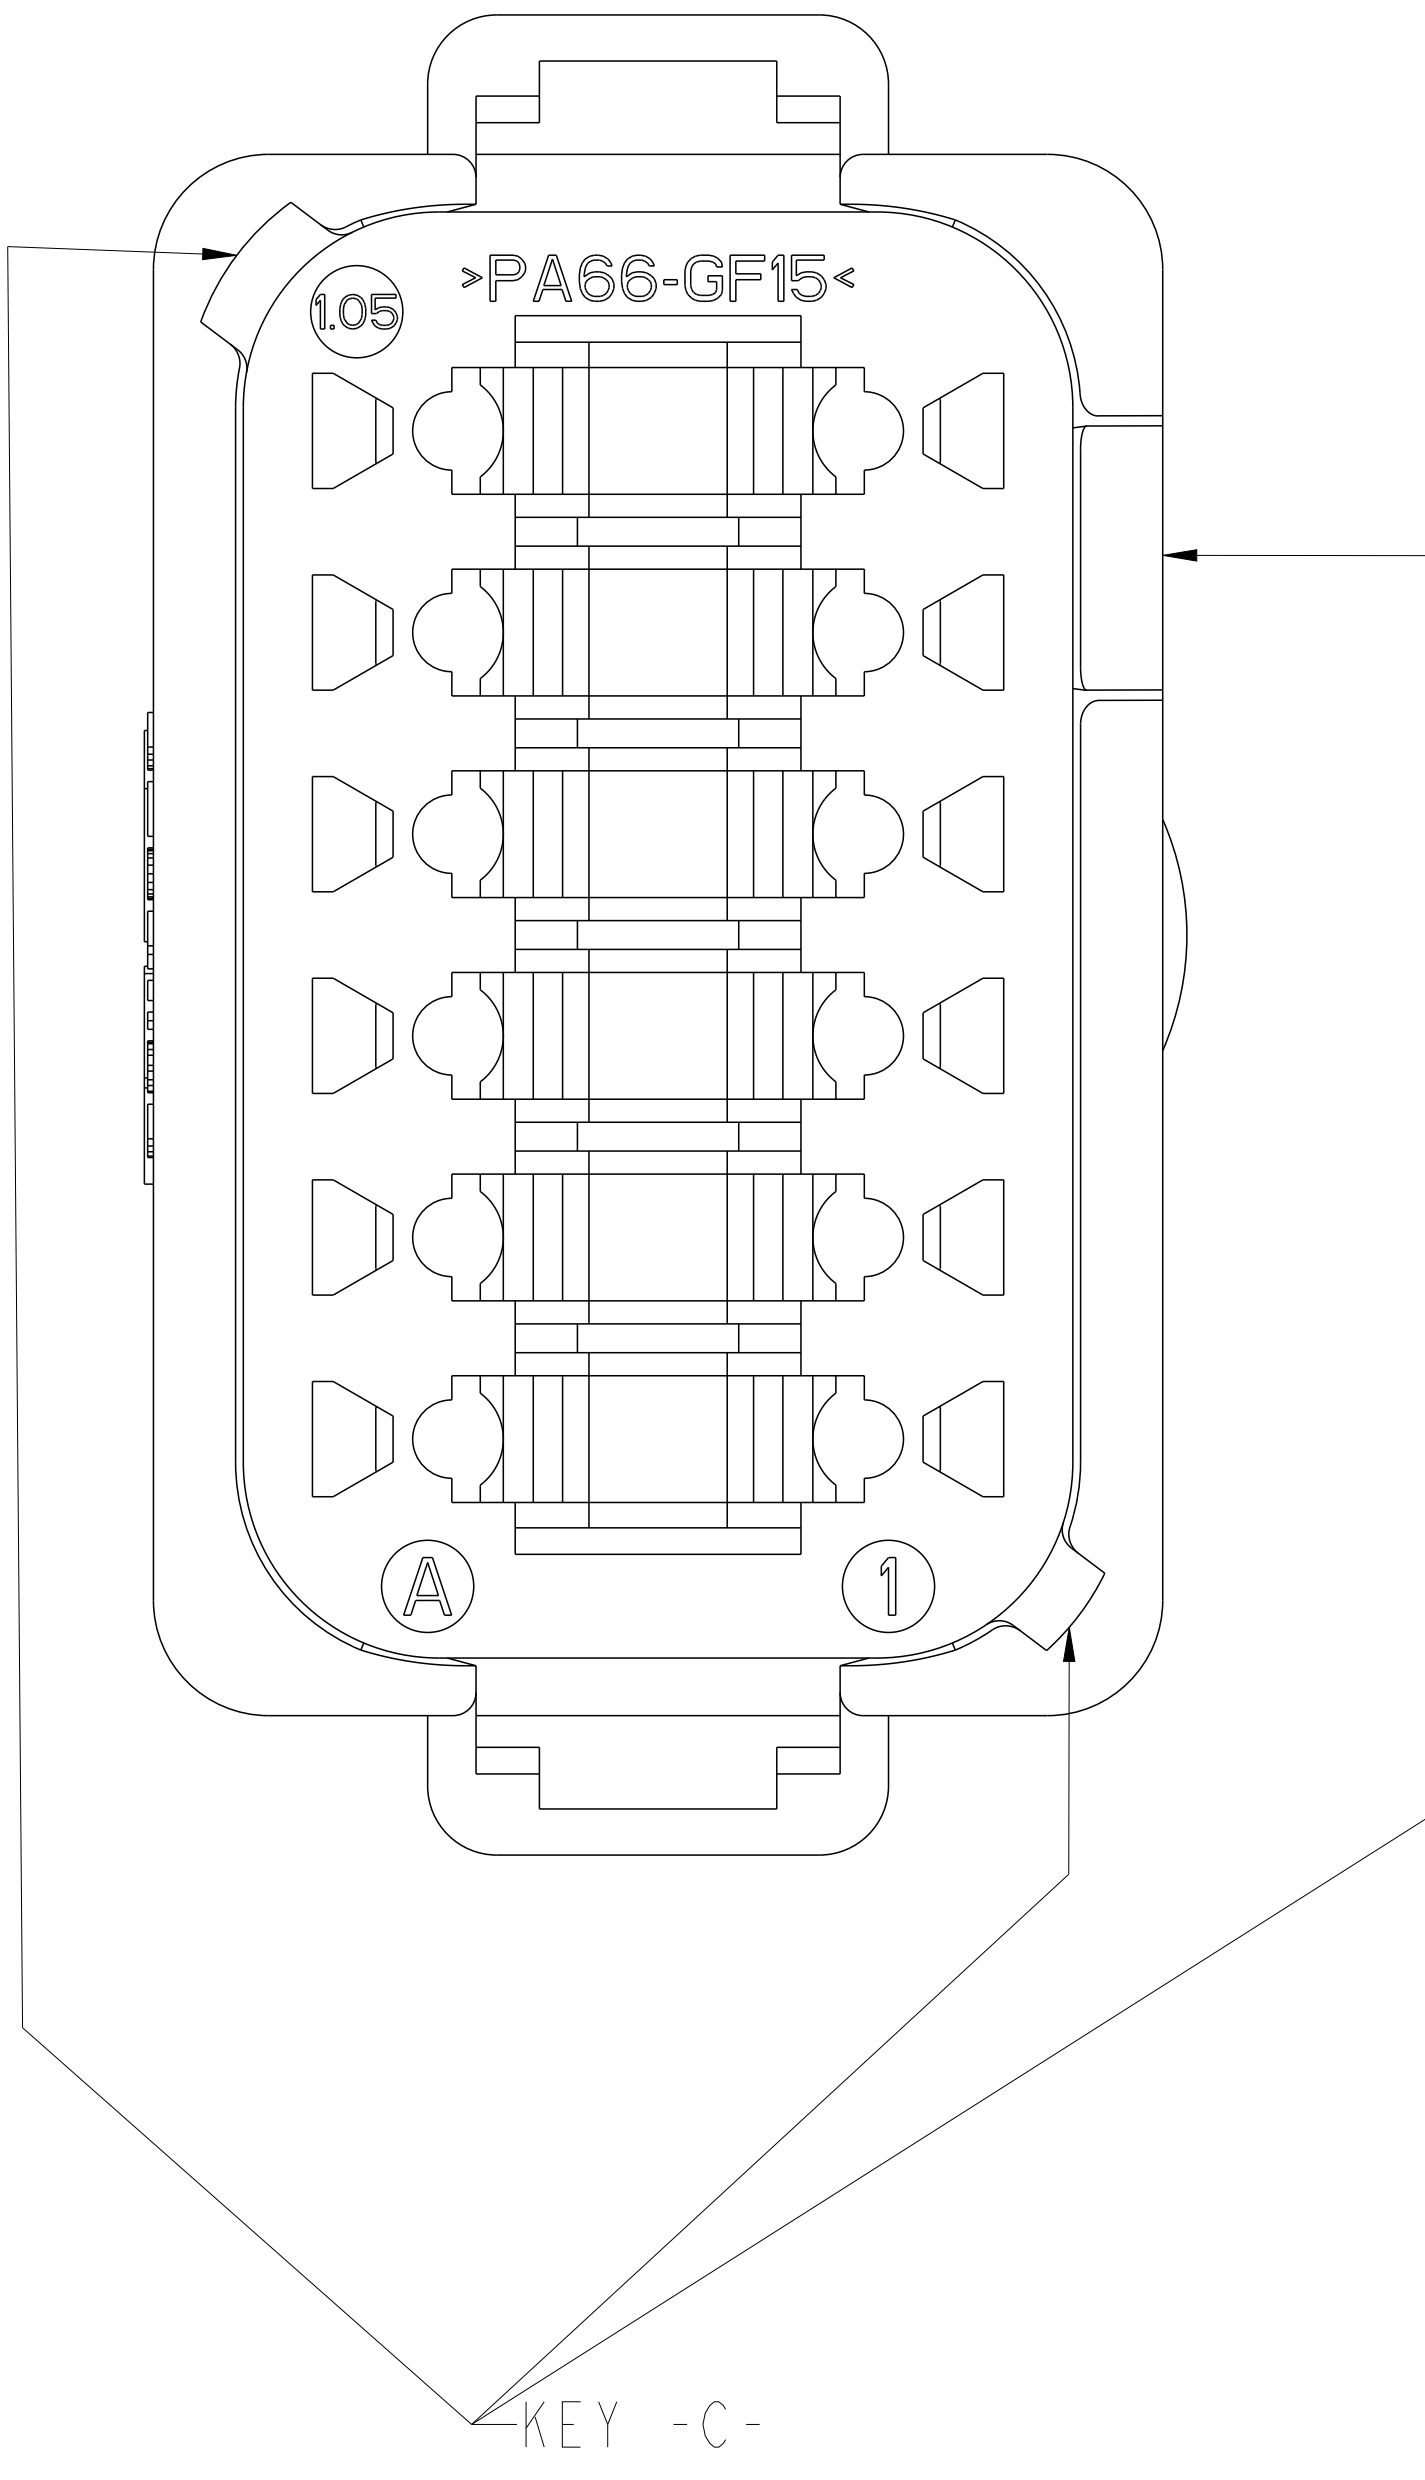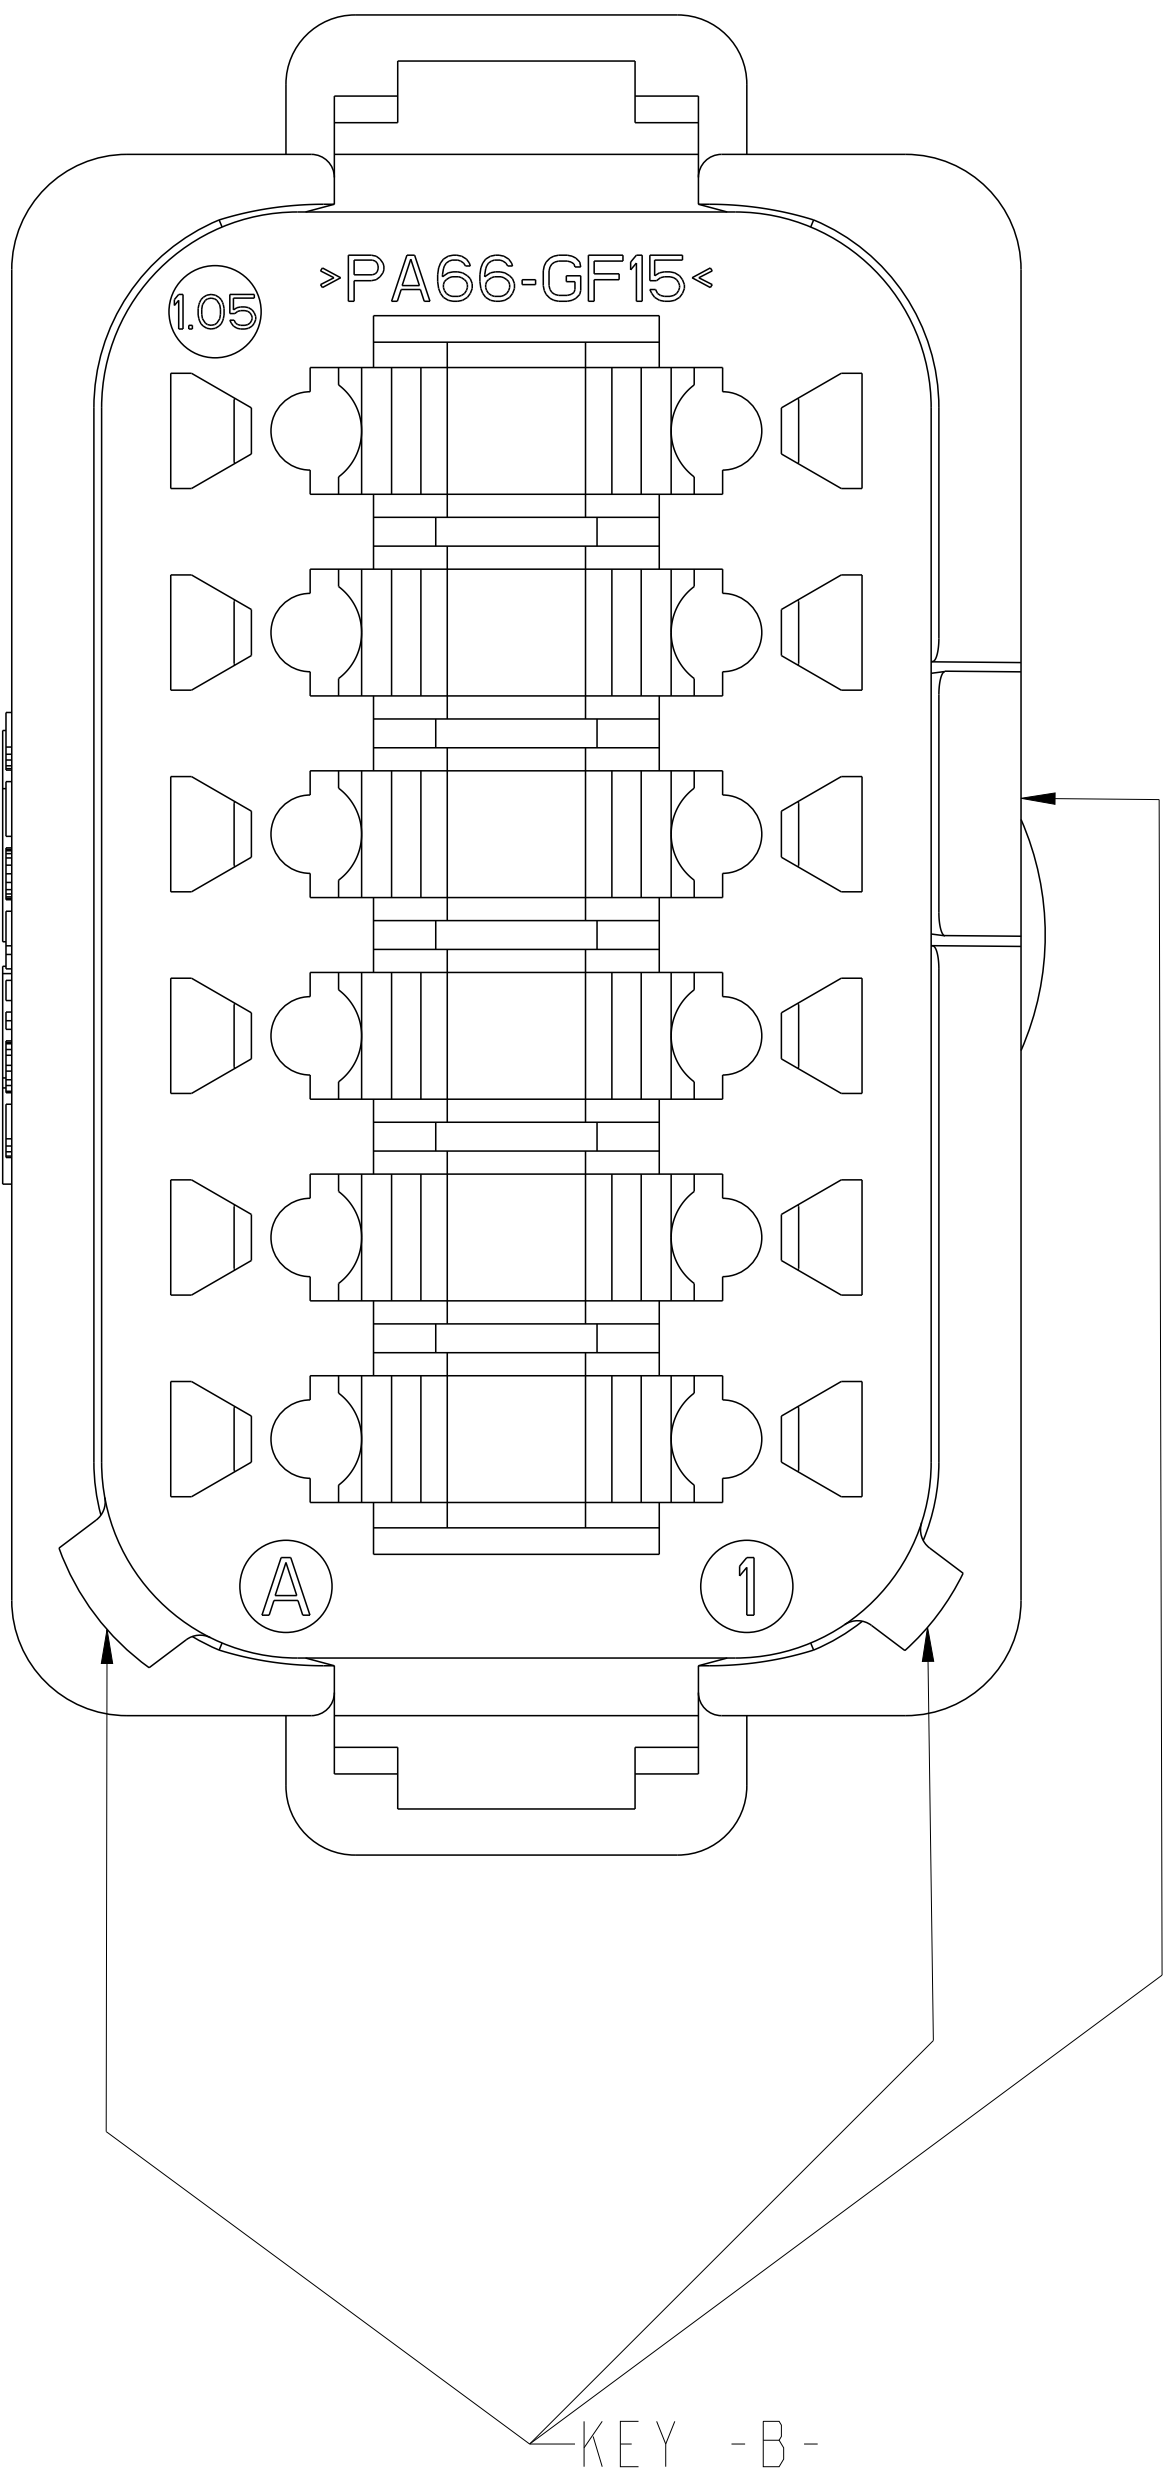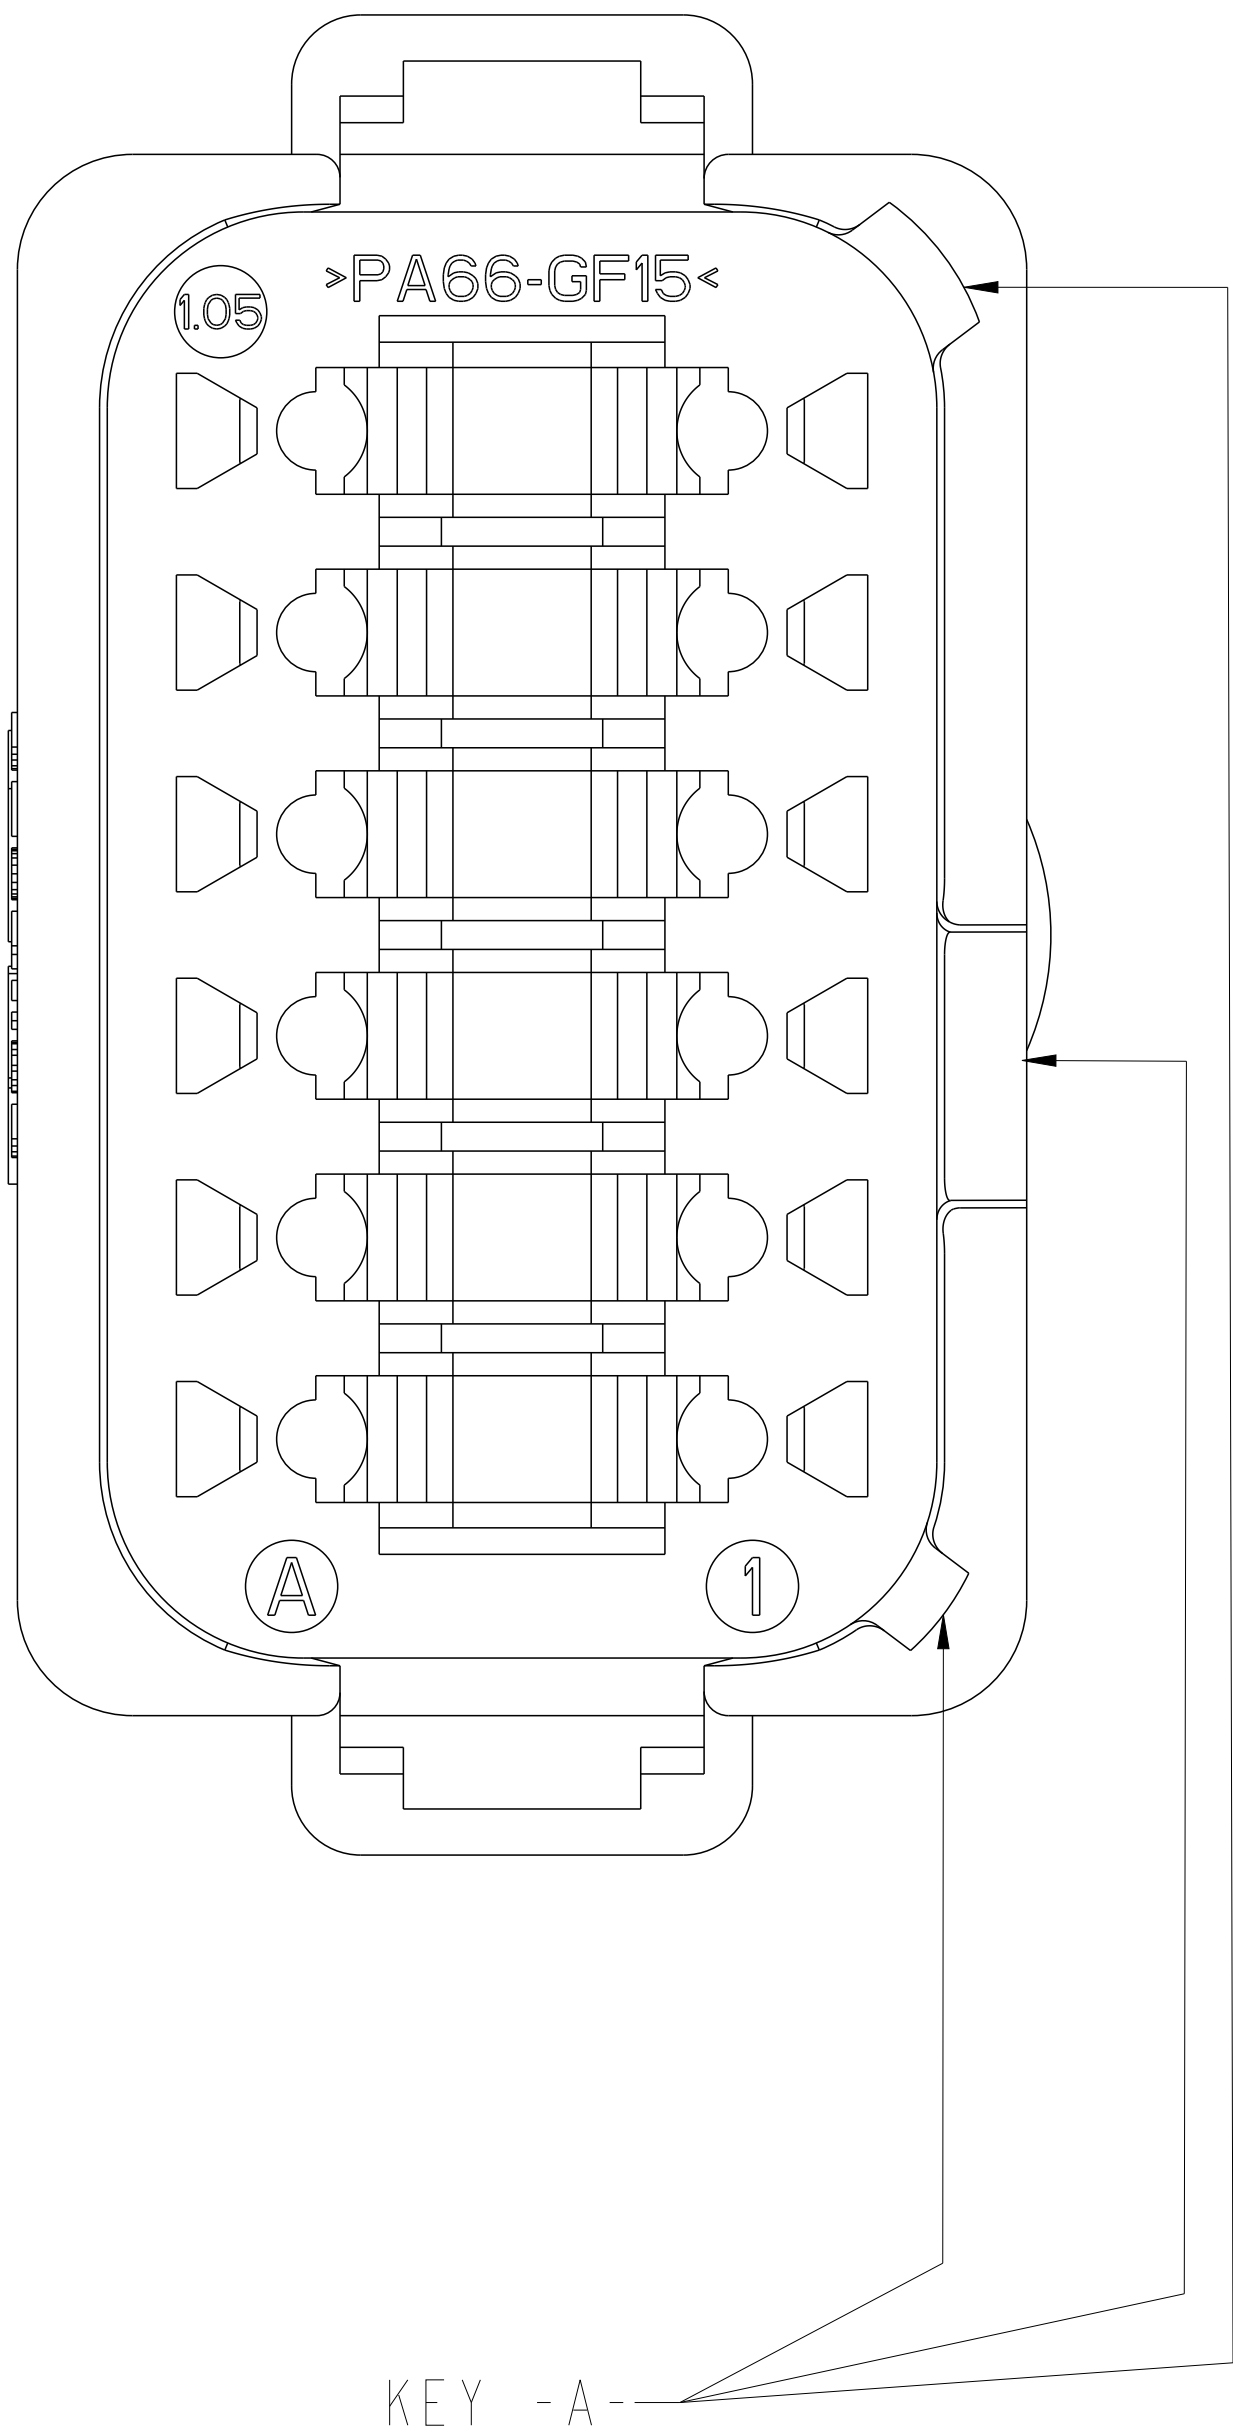


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

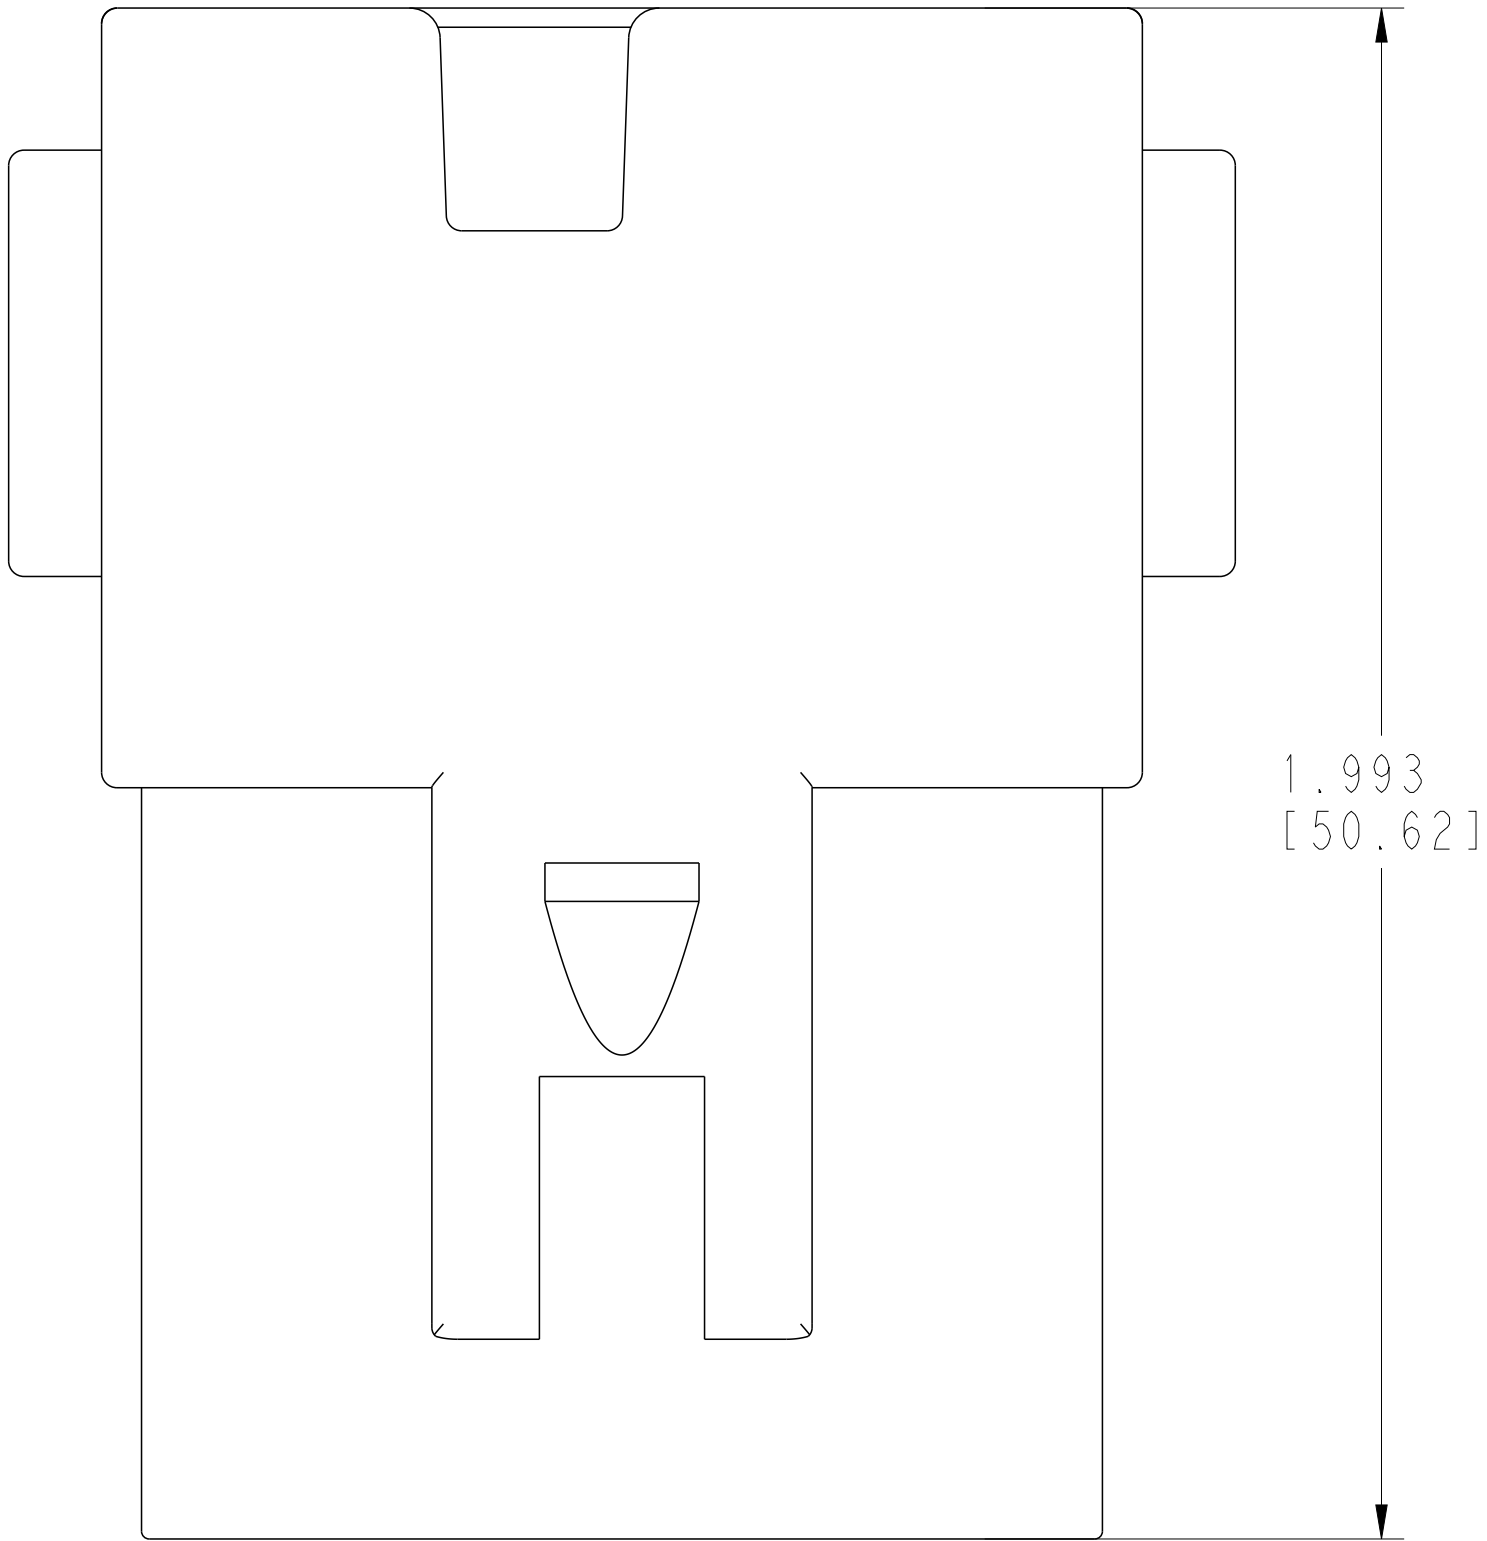

ENHANCED KEY
NO CAP

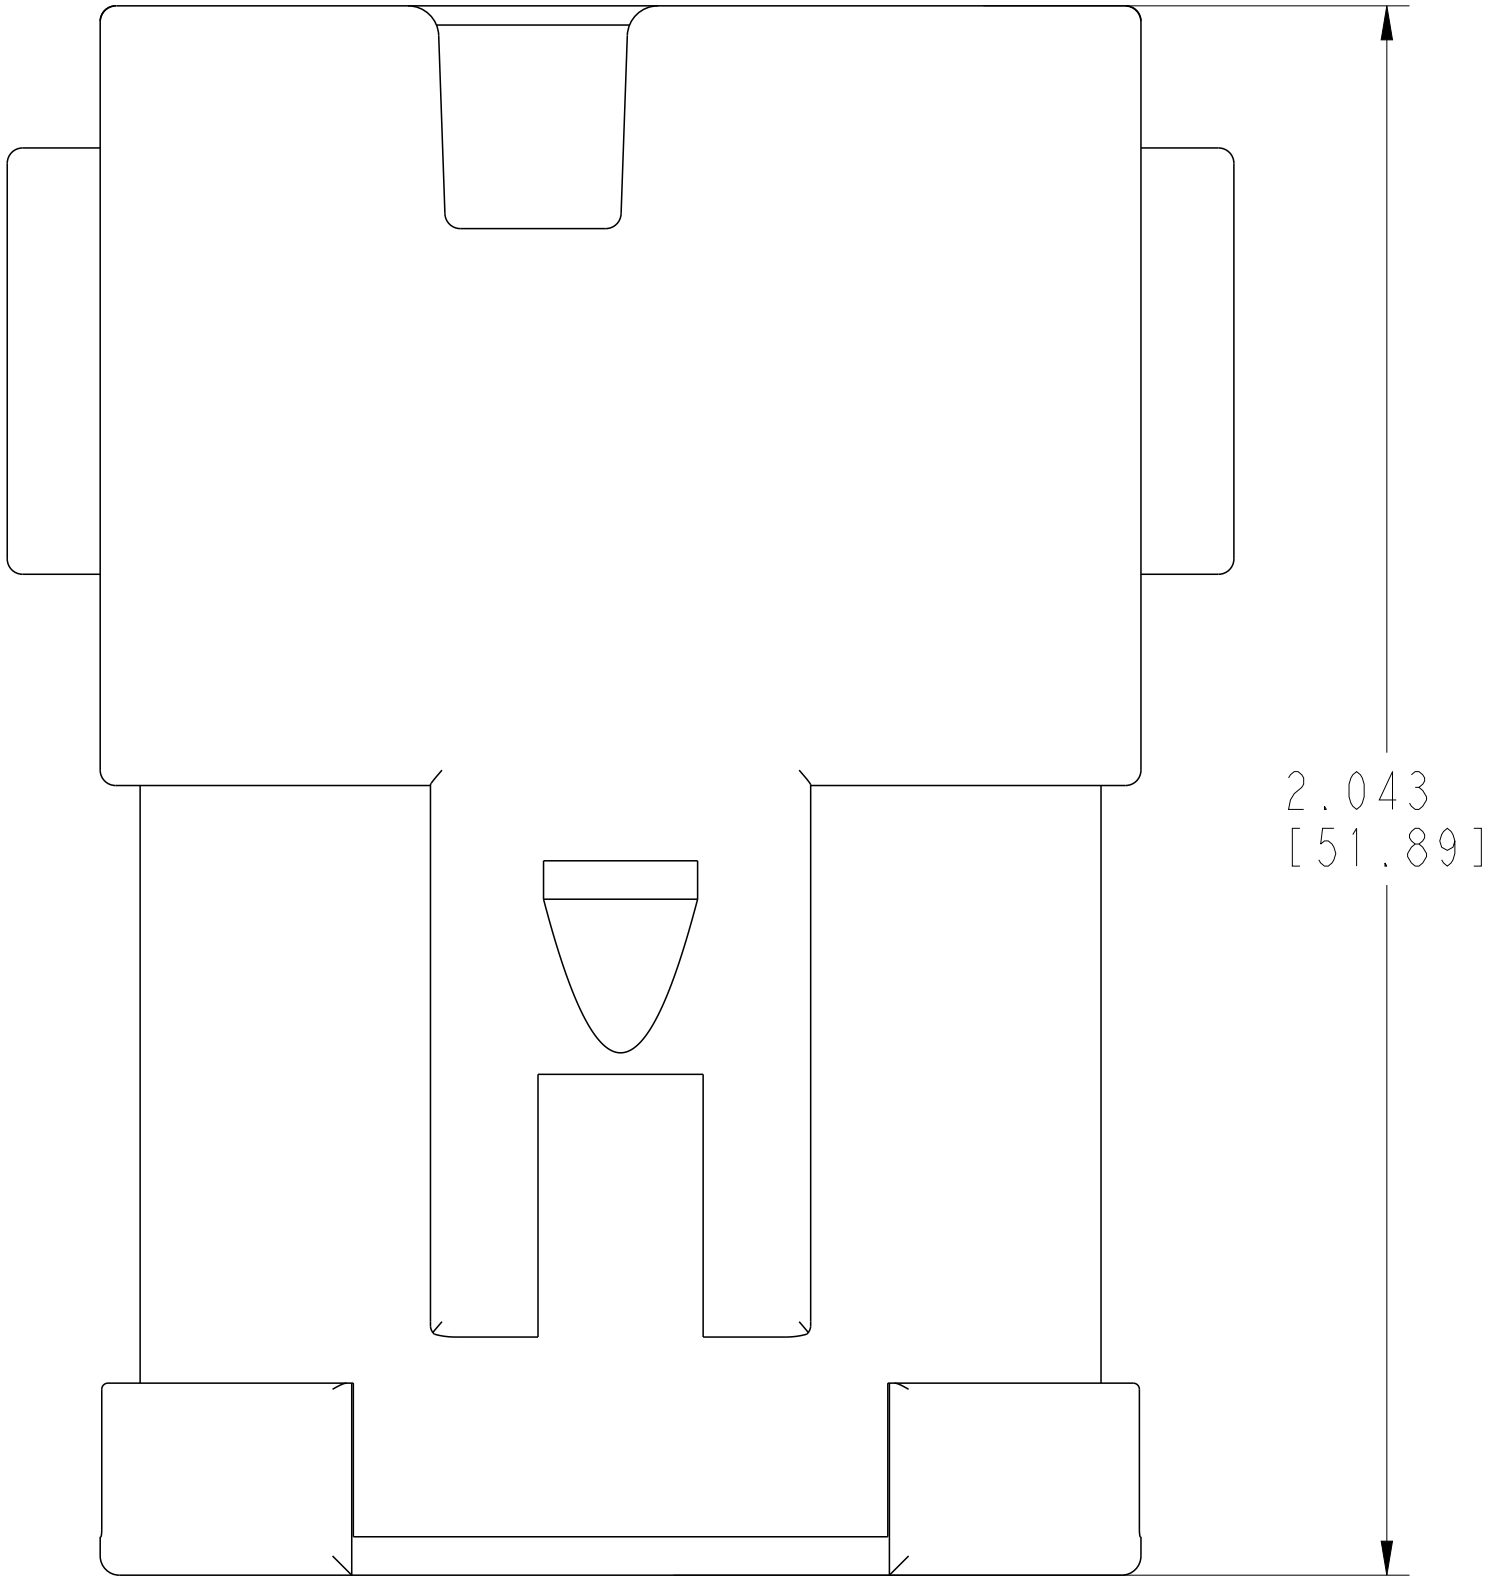

ENHANCED KEY
SHORT CAP

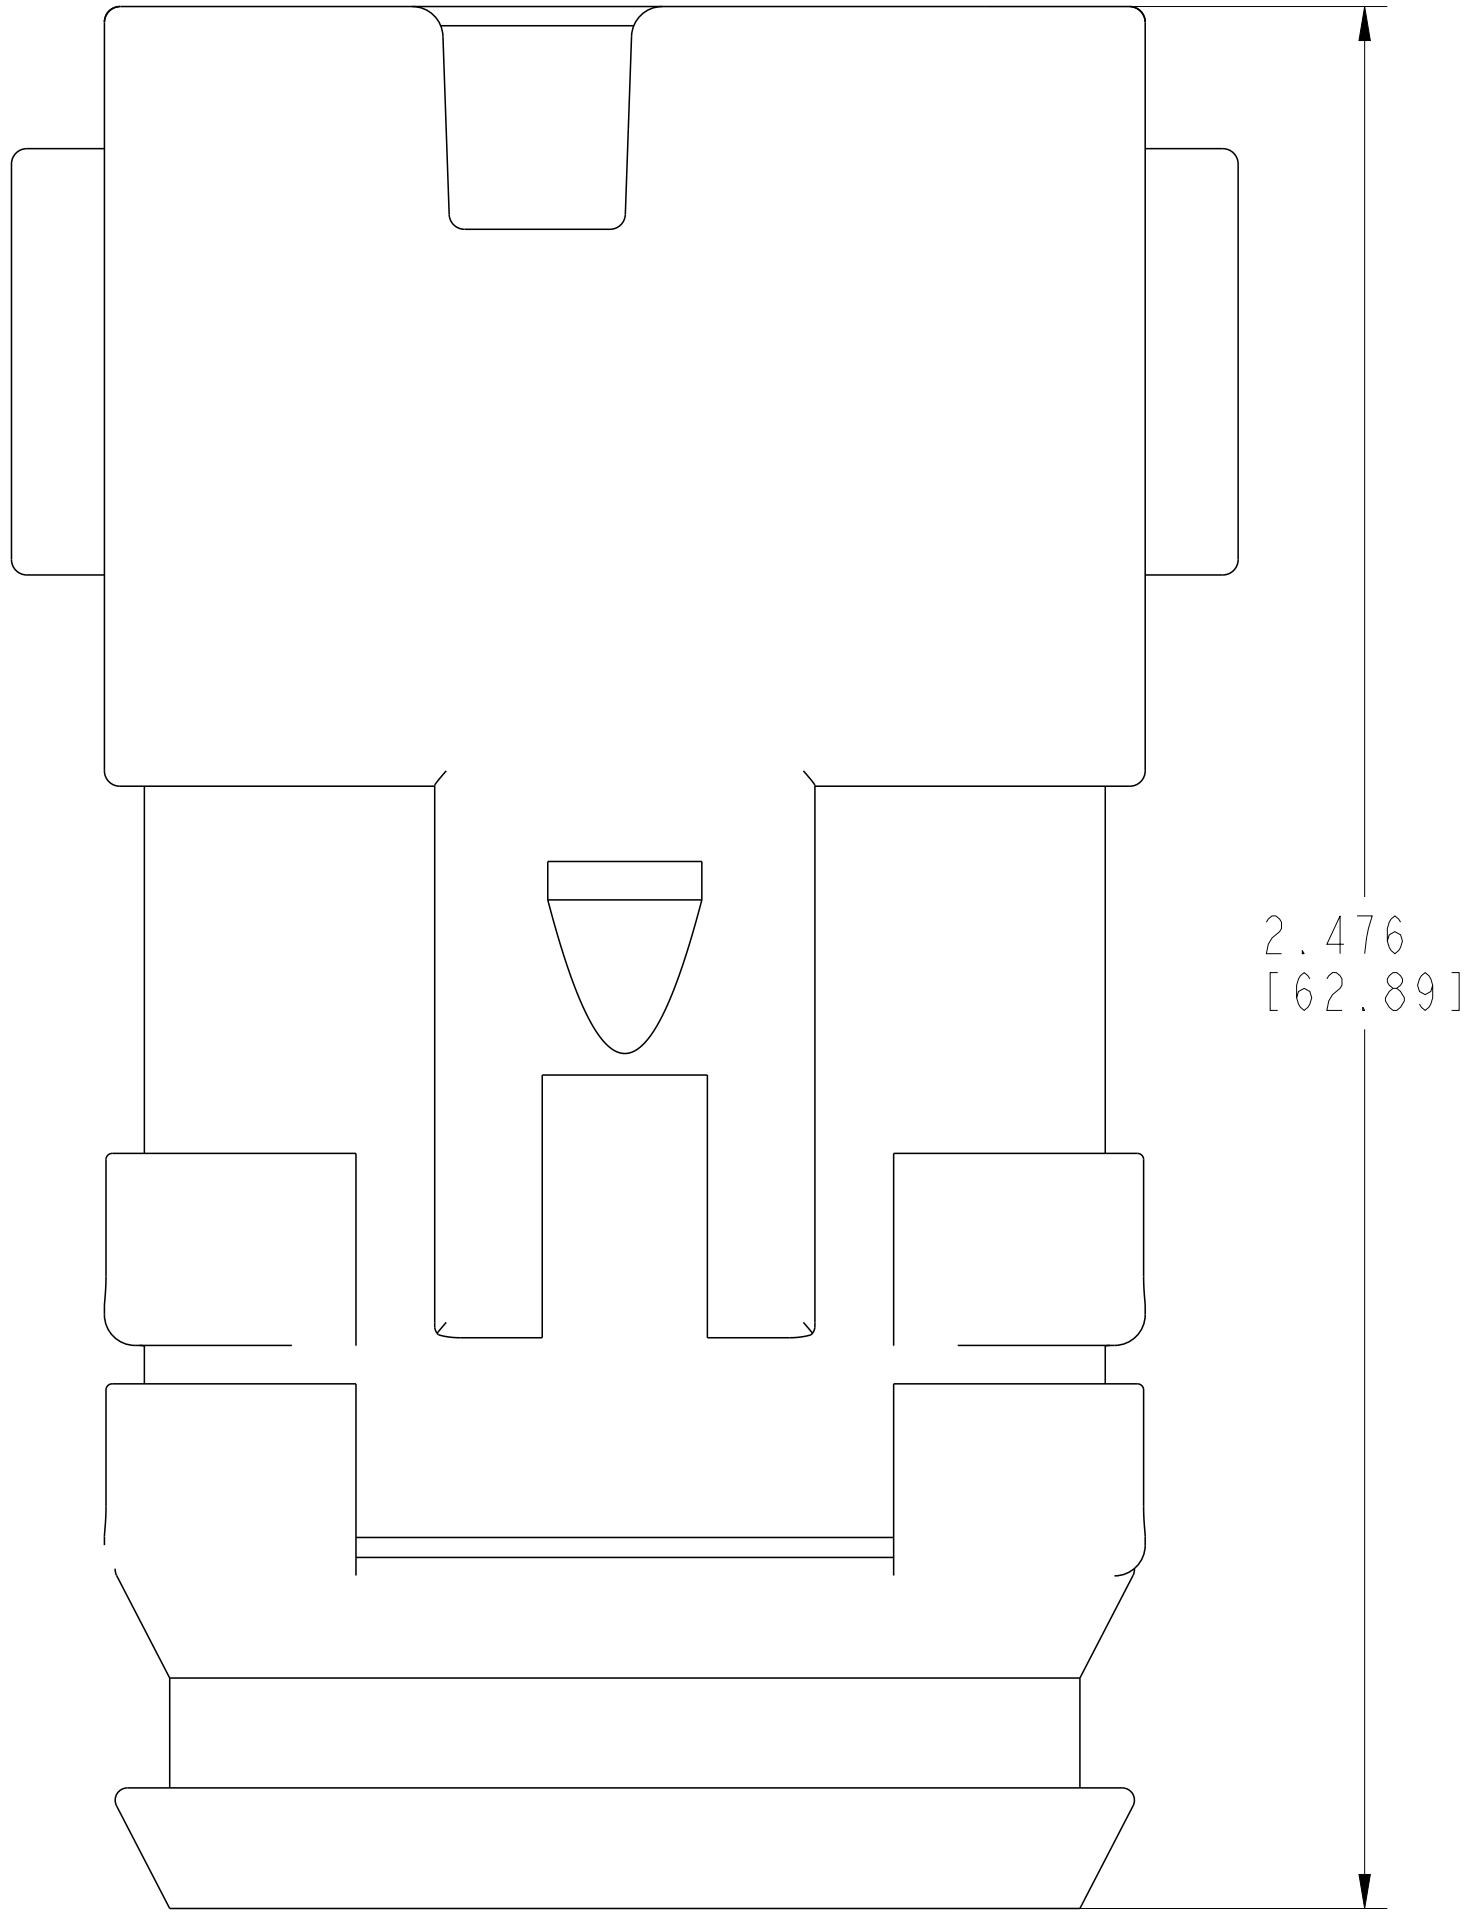

ENHANCED KEY
LONG CAP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
A. POLO
CHK
R. MESSENGER
APVD
J. GRANTCHAROVA

22DEC2021
22DEC2021
22DEC2021

TE Connectivity

NAME
12 WAY RECEPTACLE, STANDARD SEAL
EXTRA THIN SEAL, SHORT AND LONG
CAP, DT SERIES

DIMENSIONS:
IN [mm]

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ± 0.25 (0.64)
4 PLC ±
ANGLES ±0° 30' 0"

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

PRODUCT SPEC
108-151009
APPLICATION SPEC
114-151009
WEIGHT

MATERIAL

CUSTOMER DRAWING

SIZE
A

CAGE CODE
4AFU8

DRAWING NO.
DT04-12PX-XXXX

RESTRICTED TO

SCALE
5:2

SHEET
3

OF
3

REV
A4