

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2005

© COPYRIGHT 2005

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

AL

2

P

LTR

DESCRIPTION

DATE

DWN

APVD





J6

REVISED PER ECR-18-010208

23JUL2018

BDA

SF

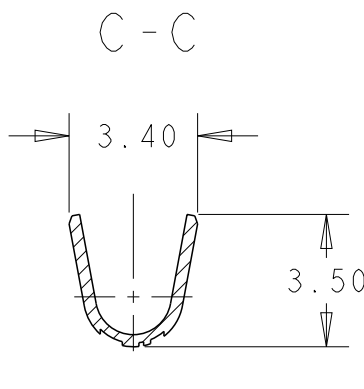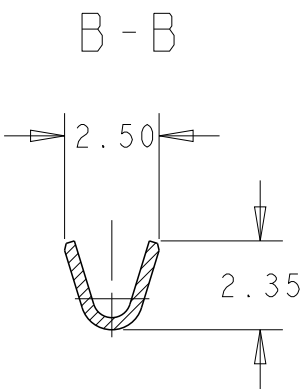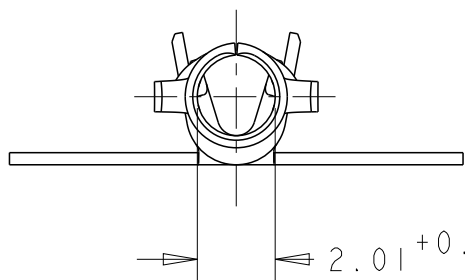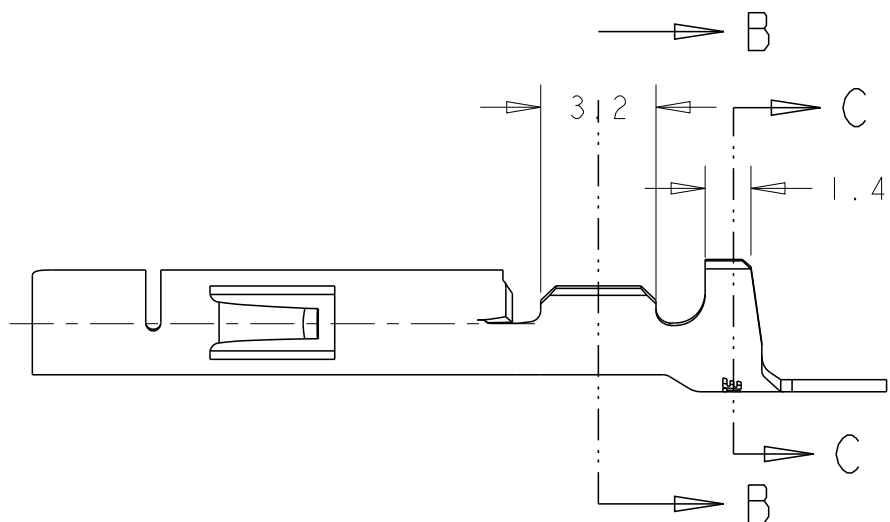

NOTES:

Bemerkungen:



2-6µm Sn OVER Ni IN CRIMP-AREA
2-6µm Sn über Ni in der Crimpzone




0.8µm Au OVER Ni IN CONTACT-AREA
0.8µm Au über Ni in der Kontaktzone

3


SUITABLE FOR Ø1.0-2.5mm
Für Isolations Ø1.0-2.5mm geeignet



0.8µm Au OVER 1.3µm Ni ON INSIDE OF WIRE BARREL AND CONTACT AREA
0.8µm Au über 1.3µm Ni in der Drahtcrimp und Kontaktzonen, sonst 1.3µm Ni

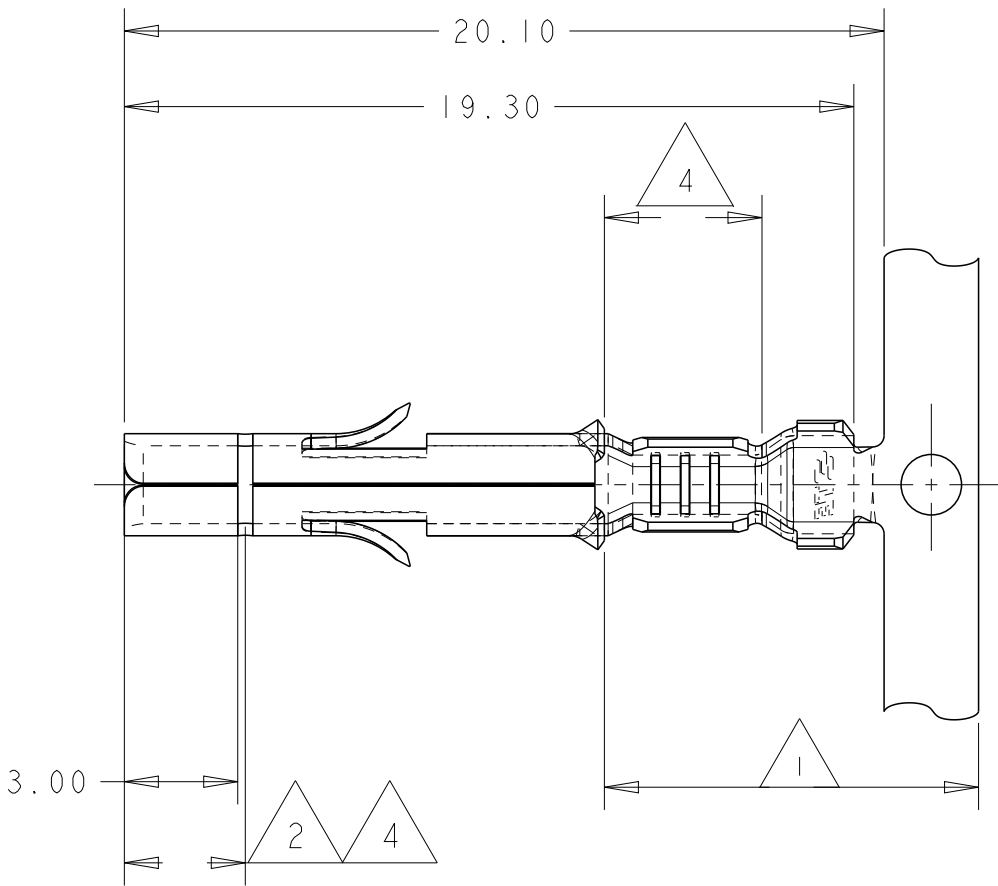

SUPERSEDED BY 350851-7	926895-7	926884-7	BRASS	 
SUPERSEDED BY 350851-7	926895-6	926884-6	PHOS BRONZE	 
	926895-3	926884-3	PHOS BRONZE	PRE-TIN
OBSOLETE	926895-2	926884-2	BRASS	
	926895-1	926884-1	BRASS	PRE-TIN
	LOOSE PIECE	PART NO.	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. Skoda	07NOV2005	 TE Connectivity	
		CHK R. Vlcek	-		
DIMENSIONS: mm		APVD -	-	NAME UNIVERSAL MNL SOCKET 0.2-0.8 mm ² WIRE RANGE -	
		PRODUCT SPEC 108-1031	-		
		APPLICATION SPEC 114-18011	-	SIZE A3	CAGE CODE 00779
MATERIAL SEE TABLE		WEIGHT -	-	DRAWING NO C-926884	RESTRICTED TO
		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1
				REV J6	