

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

BY -

ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	53		F1	REVISED PER ECO-11-005027	14MAR2011	RK
			F2	REVISED PER ECR-18-006831	12JUN2018	JB
			F3	ECO-19-006909	03MAY2019	AP
						WS

D


C

B


A

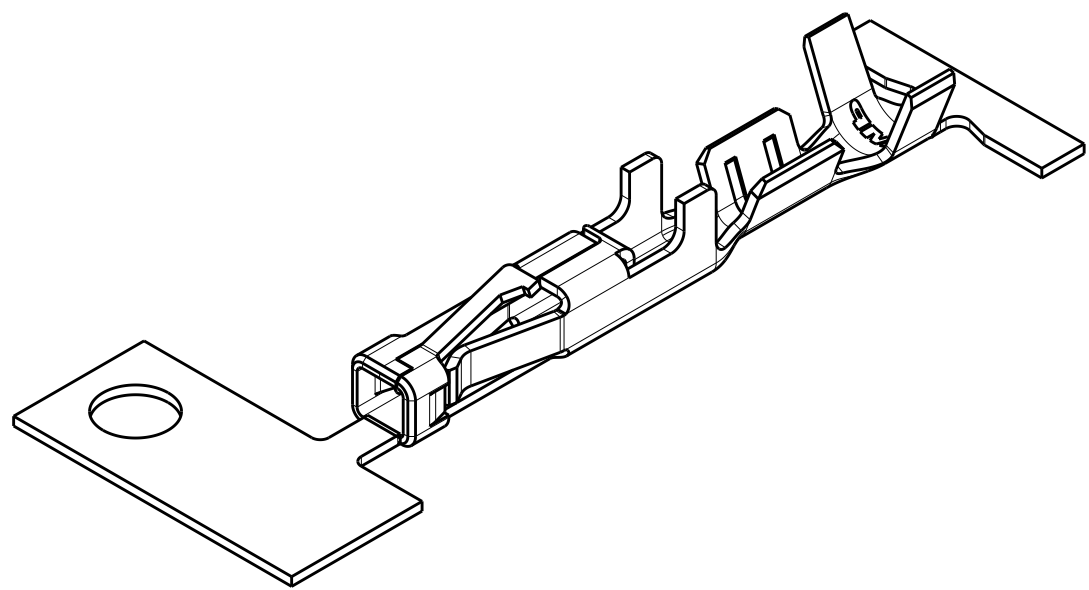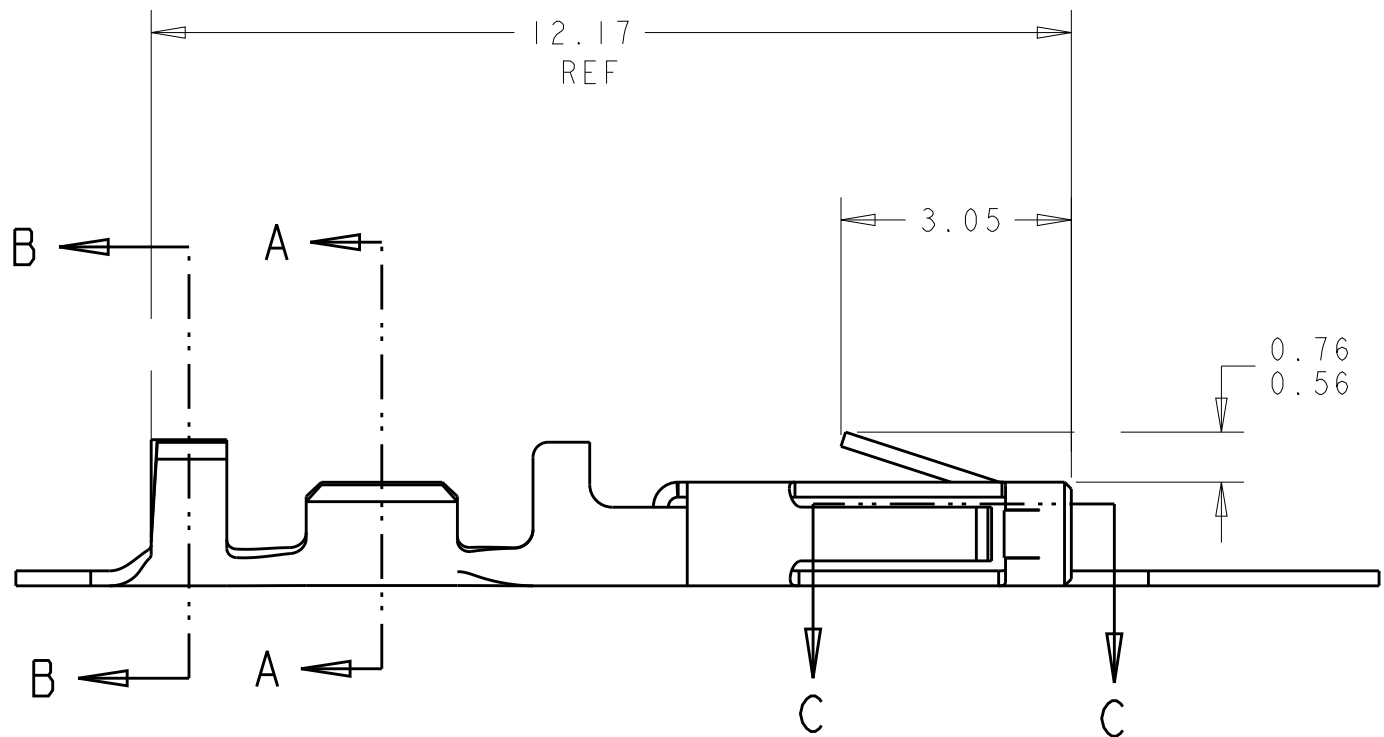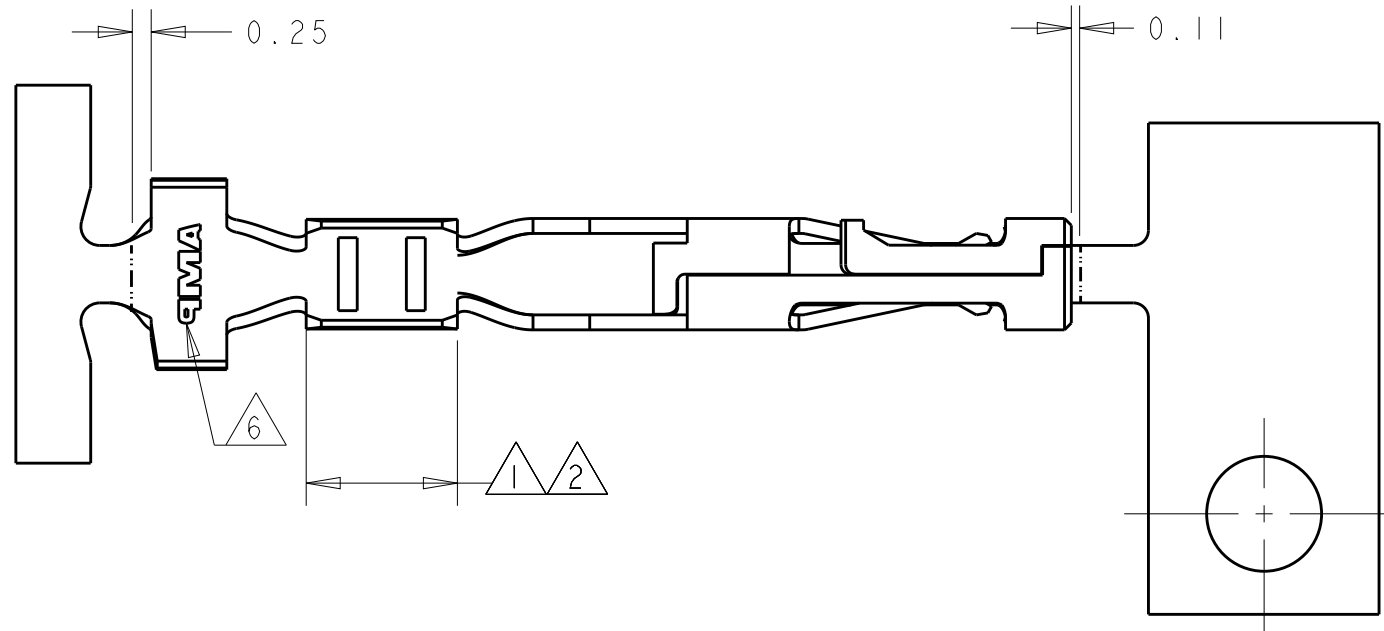


3 DIMENSIONAL MODEL
SCALE 8:1

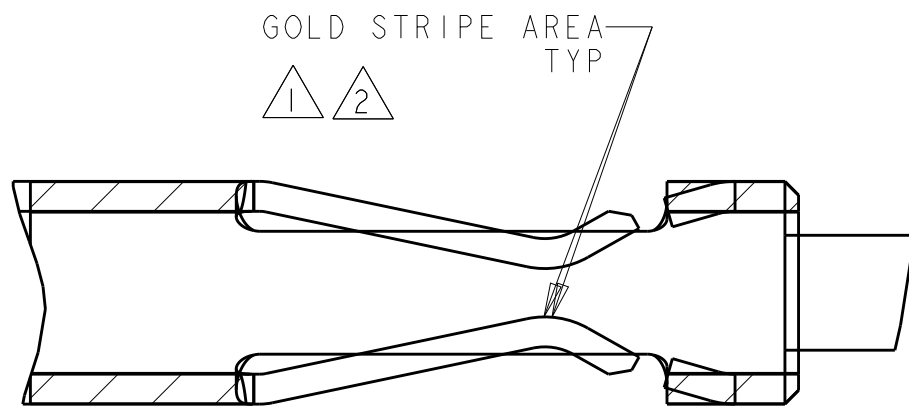

SECTION C-C
SCALE 20:1

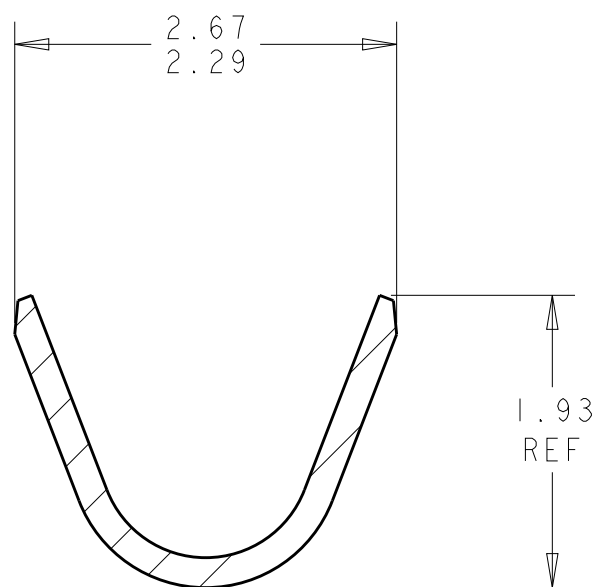

SECTION B-B
SCALE 20:1

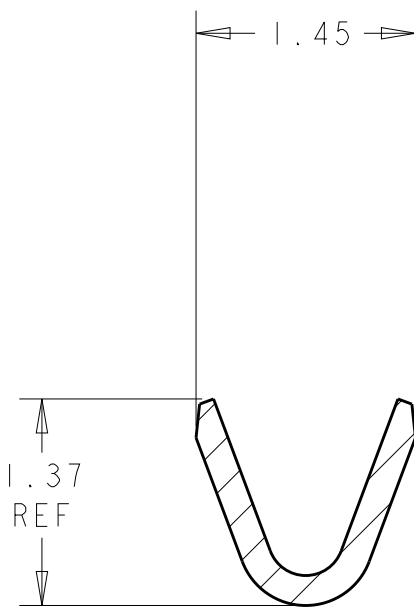

SECTION A-A
SCALE 20:1

- 1 0.000762 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.
- 2 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN IN THE CRIMP AREA, OVER NICKEL PLATE.
- 3 0.0015 - 0.0040 THK BRIGHT TIN.
4. WIRE RANGE: 26 - 30 AWG.
5. INSULATION RANGE 0.89 - 1.524.
- 6 AMP LOGO LOCATED APPROXIMATELY AS SHOWN.
- 7 0.000762 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.
- 8 0.000381 THK GOLD STRIPE IN THE GOLD PLATE AREA, BRIGHT TIN-LEAD IN THE CRIMP AREA, OVER NICKEL PLATE.

	1	1-794607-2
	2	1-794607-1
SUPERSEDED BY 1-794607-2	1	794607-3
SUPERSEDED BY 1-794607-1	8	794607-2
	3	794607-1
REMARKS	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER CHK K. COBLE APVD K. COBLE	12-OCT-1999 12-OCT-1999 12-OCT-1999	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ±		±0.30°		CONTACT, RECEPTACLE, CRIMP SNAP-IN, MICRO MATE-N-LOK(TM)	
MATERIAL 0.2 PH BRZ		SEE TABLE		SIZE A200779	CAGE CODE C-794607
		CUSTOMER DRAWING		DRAWING NO 10.1	RESTRICTED TO -
				SCALE 10.1	SHEET 1 OF 1
				REV F3	

D

C

794607

B

A