


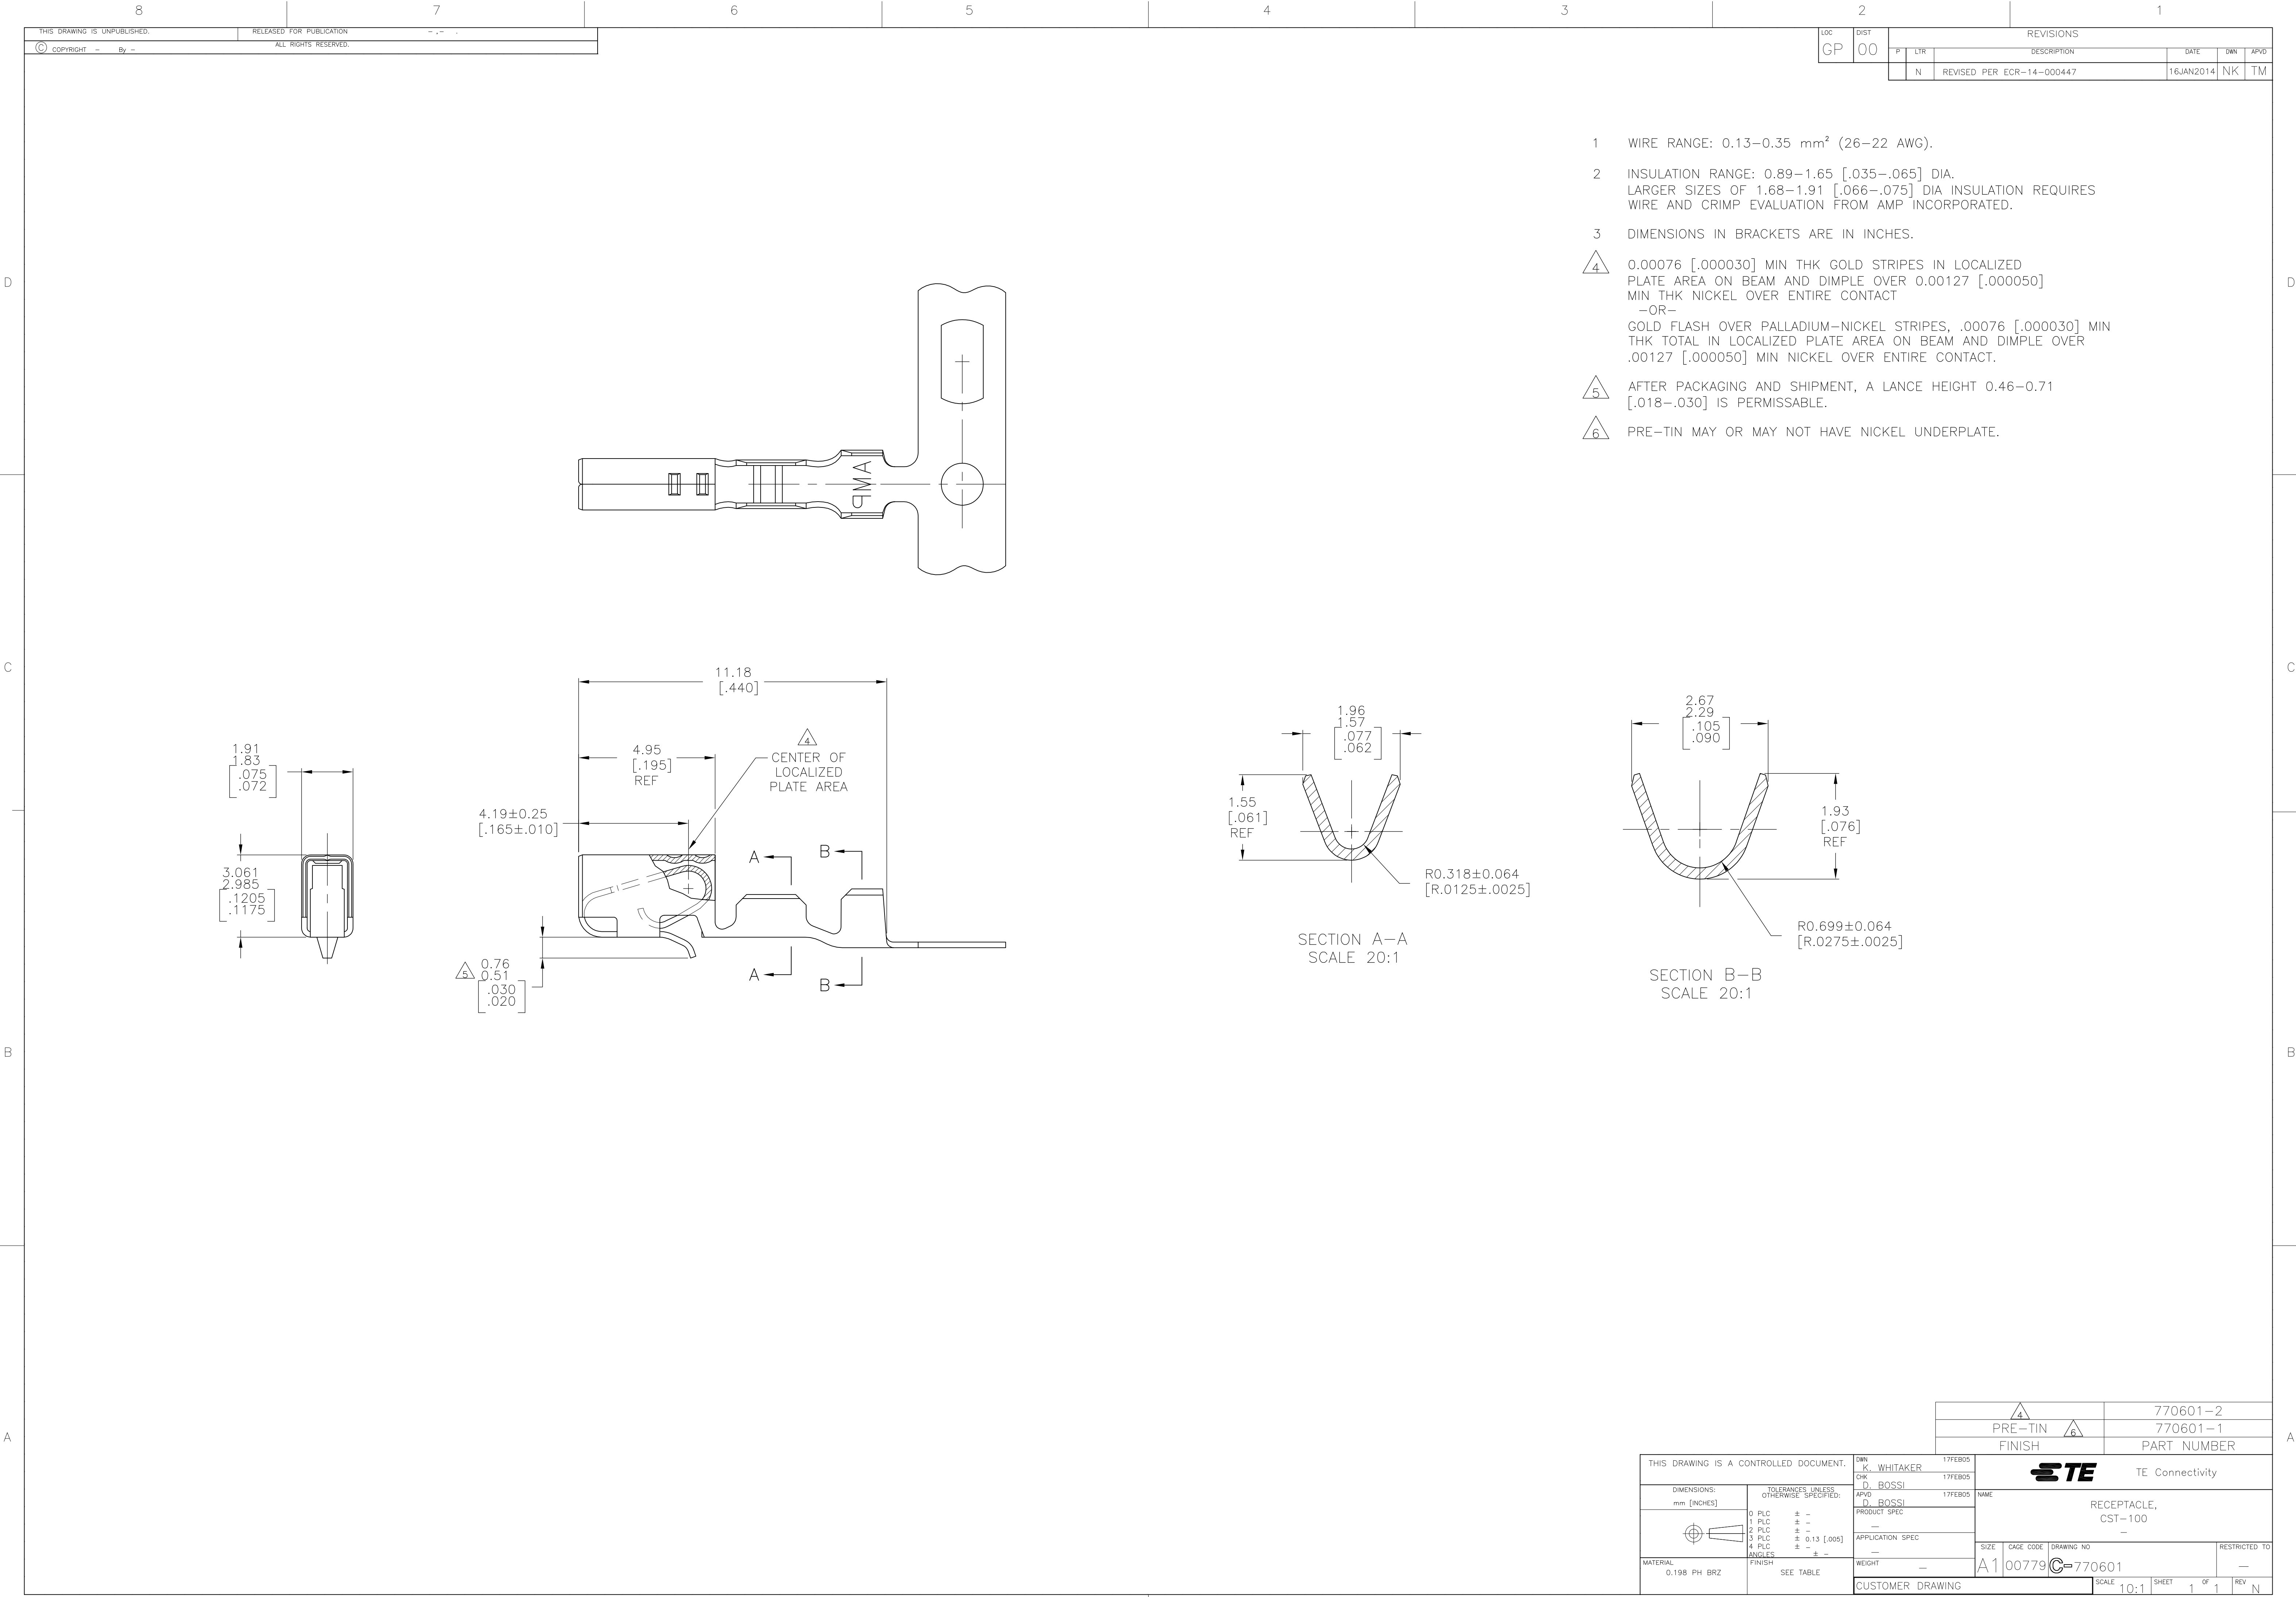

LOC		DIST		REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			N	REVISED PER ECR-14-000447	16JAN2014	NK	TM	

- WIRE RANGE: 0.13-0.35 mm² (26-22 AWG).
- INSULATION RANGE: 0.89-1.65 [.035-.065] DIA. LARGER SIZES OF 1.68-1.91 [.066-.075] DIA INSULATION REQUIRES WIRE AND CRIMP EVALUATION FROM AMP INCORPORATED.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 0.00076 [.000030] MIN THK GOLD STRIPES IN LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER 0.00127 [.000050] MIN THK NICKEL OVER ENTIRE CONTACT -OR- GOLD FLASH OVER PALLADIUM-NICKEL STRIPES, .00076 [.000030] MIN THK TOTAL IN LOCALIZED PLATE AREA ON BEAM AND DIMPLE OVER .00127 [.000050] MIN NICKEL OVER ENTIRE CONTACT.
- AFTER PACKAGING AND SHIPMENT, A LANCE HEIGHT 0.46-0.71 [.018-.030] IS PERMISSABLE.
- PRE-TIN MAY OR MAY NOT HAVE NICKEL UNDERPLATE.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 17FEB05	770601-2	
		CHK D. BOSSI 17FEB05	770601-1	
		APVD D. BOSSI 17FEB05	PART NUMBER	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	TE Connectivity	
		0 PLC ± -	RECEPTACLE, CST-100 -	
		1 PLC ± -		
		2 PLC ± -		
		3 PLC ± 0.13 [.005]		
		4 PLC ± -		
		ANGLES ± -		
MATERIAL 0.198 PH BRZ		FINISH SEE TABLE		
		WEIGHT -		
		CUSTOMER DRAWING		
		SCALE 10:1		
		SHEET 1		
		OF 1		
		REV N		