


Datasheet

Non-Fused Terminal Block, 3 Way, Screw Down, Nylon, 450 V

RS Stock 465-637



Dimensions: (mm)

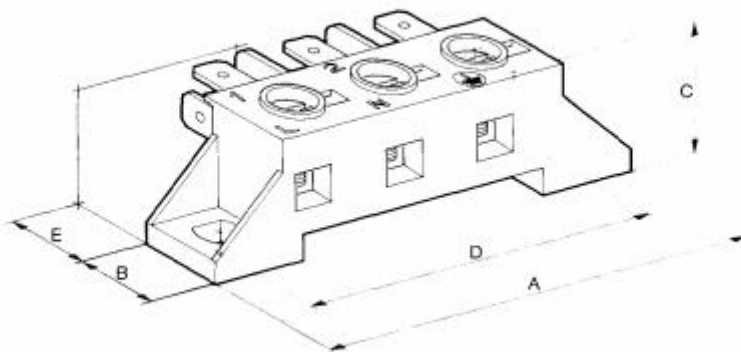

TECHNICAL DATA	FV 110	FV 173	FV 122		
poles	3	4	6		
marking	L N ⊕	L ₁ L ₂ N ⊕	1 2 3 4 5 ⊕		
rating	[6 mm ²] 40A-450V				
dimensions [mm]	A	81,5	99	135	A
	B	15	15	15	B
	C	24,5	24,5	24,5	C
	D	66,5	84,2	120,5	D
	E	16,5	16,5	16,5	E
	F	—	—	37	F

housing
brown glass filled polyamide 6.6
self-extinguishing to
CEI 23-20, UL 94 V₀ and IEC 695-2-1 to 850 °C

temperature
peak 150 °C
200 °C per brevi periodi

metal parts
zinc passivated steel:
triple **tabs** per pole
underhead knurled **screws** M 5x10
3,5 mm thread engagement
nuts
6 mm² section **shorting links**

creepage and clearance
not less than 9,5 mm between
live parts and the bus in
accordance with CENELEC HD 251 S2
CEI 61-50 §29-3

options
available without one or more
metal parts, different polarity
symbols, different position and
number of the shorting links