


ES
UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE AND VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
EFFECT. MATH MODEL FOR PRECISE DIMENSIONS, FOR ALL
OTHER DIMENSIONS IT SHOULD BE REQUIRED FOR TOOL
BUILD. USE MATH MODEL FOR PRECISE TOOL PATH DATA.
ALL RADIUS 0.5.
DRAFT IS 0°30' MAX ON ALL OUTSIDE SURFACES
MATING COMPONENTS OR EQUIVALENT:
CONNECTOR 12047781
TERMINALS MUST WITHSTAND A MINIMUM
PUSHOUT FORCE OF 89 N (20 LBS.).
RECOMMENDED BODY MATERIAL:
CONDUCTOR OR VALVE FLEXIBLE THERMOPLASTIC.

MATING CONNECTOR INFORMATION



RECOMMENDED MATERIAL: P-1546 (CA-210) BRASS
EXTRA SPRING TEMPER - TIN PLATED.
PLATING THICKNESS: 0.003 - 0.005 MM
TENSILE STRENGTH: 430 MPA
NOTE - USE OF MATERIAL WITH A CONDUCTIVITY 20% IACS
AT 68° F SHOULD BE APPROVED BY PACKARD ELECTRIC







SCALE 10:1

MATING TERMINAL INFORMATION


	A	B	C
Hr			
Dt			

(I)

→ 1.76 + 0.1 →

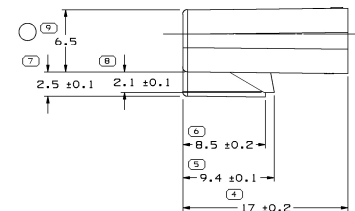

SECTION C - C



NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
DIMENSIONS NOT SHOWN DEPTH IS REQUIRED TO BE
BUILT, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. MATERIAL RECYCLING CODE PER ISO 11469, (11X10.1) CHARACTERS
AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL
CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
3. THIS PRODUCT IS NOT CATEGORIZED AS AN APPEARANCE ITEM, MINOR
IMPERFECTIONS ARE ALLOWED, BUT NOT DISCOLORATION, COLOR
BLEMISHES, GATE VESTIGE, AND SOFT FLASH THAT DO NOT AFFECT THE
FIT, FORM, OR FUNCTION OF THE PART ARE PERMISSIBLE PER DPNP-4.7-CS-01.
4. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
5. THIS CONNECTOR WILL PASS THRU A Ø13 MIN HOLE.
6. (11X10.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY
EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY.
OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED".
7. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS.

		1					2					
.5	DND STATUS						REVISION HISTORY					AUT
BOL	DTE	STB	REV	NP	CHE	ZONE	DATE	TIME	BY	DESCRIPTION	CLCNG CODE	
	29JAO2	R	01	-	-					ALL PARTS - CREATED PD AND ADDED MATERIAL RECLING CODE		2161
	12JA04	R	02	-	-					ADDED DIM 10 AND INFO NOTE.		2498
	04AP06	R	03	-	-					12065422 - MAT'L SPEC WAS M359Z0002		2787
	13NO07	R	04	-	-					ALL PARTS - UPDATED PDM ATTRIBUTES		4028
	15JUN11	R	05	-	-					ALL PARTS - 6.5 ± 0.15 WAS 6.5 ± 0.1. REVISED SIZE CHARACTERS & LOGOS		4145

[illegible]

DELPHI DELPHI PACKARD ELECTRICAL/ELECTRONIC DIVISION, OR			
OR MPV-D R. HERMOSILLO MPV-D G. CHACON MPV-D G. MACIAS MPV-D MPV-D			
SUBSTANCES OF CONCERN AND CONTENT PER DELPHI 1004 WATER/IL SEE CHART			
DRAWING NAME TAXI CONN F W/P 150			
DRAWING NUMBER 1206518			
SIZE A-D	SCALE	FRAME NO	SHEET NO

12065422	Q2	AB		POLYAMIDE COMPOUND CREAM	0.781
12047781	A4			POLYAMIDE COMPOUND BLACK	0.781
PART NO	REV	N/P	STATUS	MATERIAL SPECIFICATION AND COLOR	VOL CM ³

		4		PROCESS SENSITIVE DIMENSION					
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED									
DIMENSIONAL RANGE (mm)		CHART							
FROM	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300
TO	0	30	70	100	150	200	250	300	400
TOLERANCE UNLESS OTHERWISE SPECIFIED									
	±0.15	±0.2	±0.3	±0.4	±0.5	±0.6	±0.8	±1	±1.1