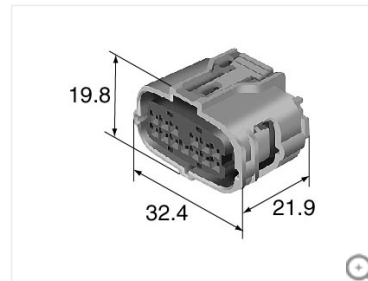


Product information


[3D drawings](#)
[Contact us for products](#)

6189-1092

TS sealed series

Housing Inline

0.64mm(025)







Sealed/Unsealed	sealed
Male/Female	F
Way	13
Mating parts	6188-4914 (TS sealed series)

Materials	PBT
Color	Gray





Contact resistance	Initial	8mΩ Max.
	after durability tests	16mΩ Max.
Leak current	50μA Max.	
Insulation resistance	100MΩ Min.	
Seal	Initial	50kPa Min.
	after durability tests	30kPa Min.

TS sealed series related products

Terminal (6)


[0.64mm 8240-0336](#)

[0.64mm 8240-0337](#)

[0.64mm 8100-3455](#)

[0.64mm 8100-3456](#)

[0.64mm 8240-0287](#)

[0.64mm 8240-0288](#)
[Hide some results](#)

Wire seals (5)



[0.64mm 7165-1043](#)

[0.64mm 7165-1312](#)

[0.64mm 7165-1198](#)

[0.64mm 7165-1199](#)




0.64mm 7165-1423

Hide some results

Dummy plugs (1)



0.64mm 7165-0797