



C e m b r e
MAKING THE RIGHT CONNECTIONS

ANE3-P14

16mm² Polyamide PA6.6 insulated pin terminal 18mm pin length black



General Information

Material Code	2415860
Weight per Piece	4.38
Weight Unit of Measure	G
Commodity Code (Export Code)	85369010
Country of Origin	IT


Dunton Park, Kingsbury Road
Curdworth, Sutton Coldfield
West Midlands

T: 01675 470440 E: sales@cembre.co.uk W: <http://www.cembre.co.uk>

Technical

Conductor Size Min (mm ²)	16
Conductor Size Max (mm ²)	16
Conductor Type	Copper
Terminal Type	Insulated pin
Pin Length (mm)	18
Max. Voltage Rating (kV)	1
Inspection Hole	N/A
Suitable for Indoor Use? (no exposure to water or moisture)	Yes
Suitable for Outdoor Use? (exposure to water and moisture)	No
Insulated?	Partially
Insulation Material	Polyamide PA6.6
Insulation Colour	Black
Halogen Free?	No
Flammability Rating (UL94)	V2
Max. Operating Temperature (°C)	115
Surge Operating Temperature (°C)	130
Min. Operating Temperature (°C)	-20
UL Listed?	Yes
UL Listing File Number	E125401

Datasheet generated from <https://onetimepim.com> last updated Thursday, June 30, 2022 2:01:24 PM

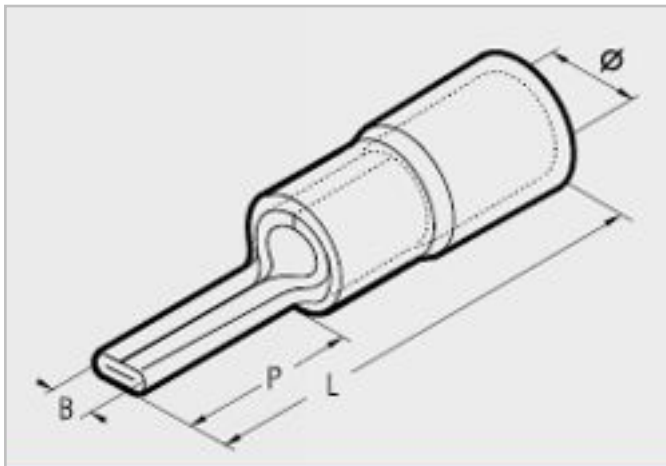

Ref.	Dimensions mm			
	Ø	B	P	L
ANE 2-P 12	8,0	4,3	14,5	35,1
ANE 3-P 14	9,2	5,5	18,0	41,1
ANE 5-P 16	11,1	7,0	20,3	45,0
ANE 7-P 20	13,6	8,0	24,5	55,0