


Hall-Effect Speed Sensor HA-P2

www.bosch-motorsport.com



BOSCH
Invented for life

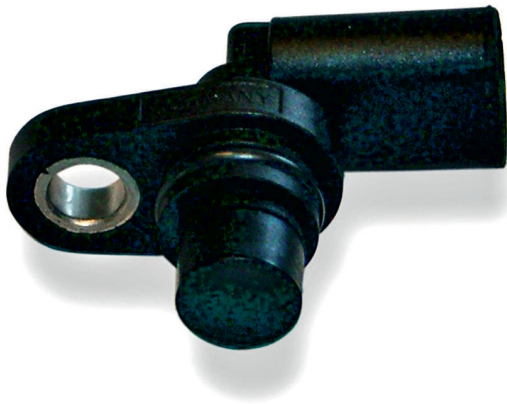

- ▶ Camshaft/crankshaft/wheel speed
- ▶ 15 mm depth
- ▶ Very small housing
- ▶ Very light weight
- ▶ Active low

This sensor is designed for incremental measurement of rotational speed (e.g. camshaft, crankshaft or wheelspeed).

Due to the rotation of a ferromagnetic target wheel in front of the HA-P2, the magnetic field is modulated at the place of the Hall probe. A Hall-effect sensor element with integrated signal conditioning circuit detects this change and generates a digital output signal. The main feature and benefit of this sensor is the combination of a high quality production part, robust design, very small housing and low weight.

Application

Application

Application	Speed
Max. frequency	≤ 10 kHz
Target wheel air gap	0.5 to 2.5 mm
Temperature range	-40 to 160°C
Output circuit	Open collector for 1 kOhm
Output type	Active low
External magnetic fields	< 0.1 mT
Max. vibration	400 m/s ² at 10 Hz to 2 kHz

Technical Specifications

Mechanical Data

Weight w/o wire	12 g
Bore diameter	15 mm
Installation depth L2	15 mm
Mounting	With screw 1 x M6
Tightening torque	8 Nm

Electrical Data

Power supply US	4.75 to 18 V
Current I _s	10 mA

Characteristic

Accuracy repeatability of the falling edge of tooth	
up to 1.5 mm	< 4 % (≤ 10 kHz)
up to 2.5 mm	< 8 % (≤ 10 kHz)
Signal output	0.4 V to < U _s

Connectors and Wires

Connector	Hirschmann 872-658-501 Cod.A
Mating connector	F 02U B00 520-01
Pin 1	U _s
Pin 2	Sig
Pin 3	Gnd

Environment

Target wheel diameter D	162.34 mm
Thickness t	12.5 mm
Width of teeth b1	3.8 mm
Width of gap b2	4.7 mm
Width of sync. gap b3	20.79 mm
Depth of teeth h1	3.4 mm
Number of teeth	60-2

Installation Notes

Application Notes

The HA-P2 can be connected directly to most control units and data logging systems.

Please avoid abrupt temperature changes.

For mounting please use only the integrated plug.

If a wheel with different dimensions is used (see Environment), the technical function has to be tested individually.

Please ensure that the environmental conditions do not exceed the sensor specifications.

Please find further application hints in the offer drawing at our homepage.

Safety Note



The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

Ordering Information




Hall-Effect Speed Sensor HA-P2

Order number **0 232 103 111**


Dimensions

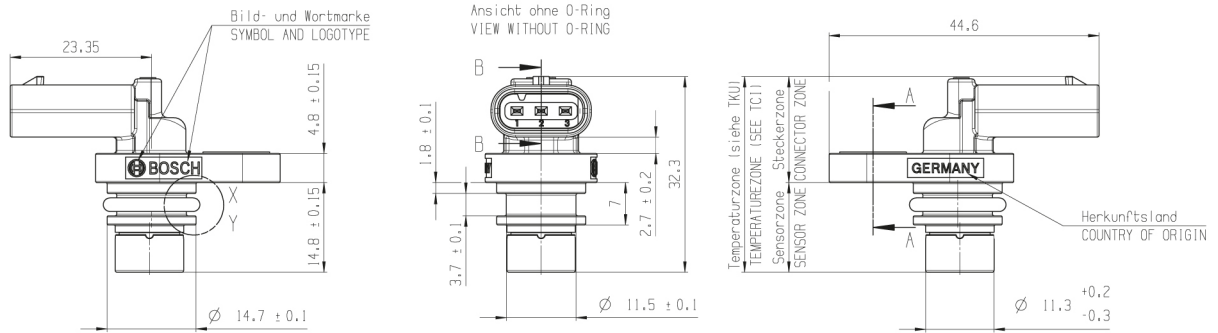

GLOBAL MOUNTING REQUIREMENT

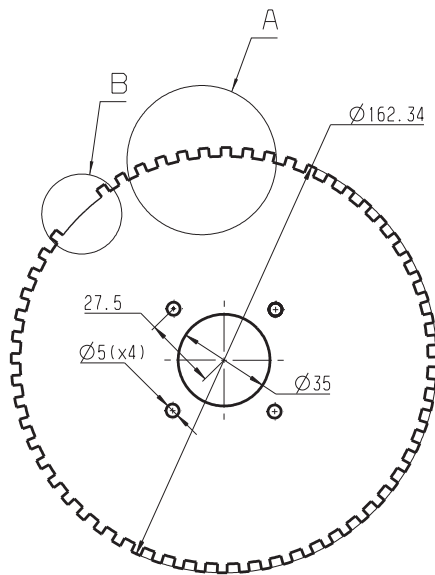

60-2 Teeth

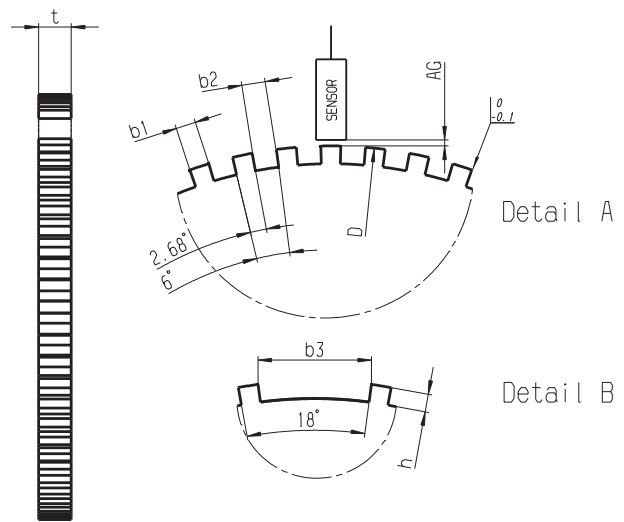

Left view

Represented by:

Europe:

Bosch Engineering GmbH
Motorsport
Robert-Bosch-Allee 1
74232 Abstatt
Germany
Tel.: +49 7062 911 9101
Fax: +49 7062 911 79104
motorsport@bosch.com
www.bosch-motorsport.de

North America:

Bosch Engineering North America
Motorsport
38000 Hills Tech Drive
Farmington Hills, MI 48331-3417
United States of America
Tel.: +1 248 876 2977
Fax: +1 248 876 7373
motorsport@bosch.com
www.bosch-motorsport.com

Latin America:

Robert Bosch Ltda
Motorsport
Av Juscelino Kubitscheck de
Oliveira 11800
Zip code 81460-900
Curitiba - Parana
Brasilia
Tel.: +55 41 3341 2057
Fax: +55 41 3341 2779

Asia-Pacific:

Bosch Engineering Japan K.K.
Motorsport
18F Queen's Tower C, 2-3-5 Minato Mirai
Nishi-ku, Yokohama-shi
Kanagawa 220-6218
Japan
Tel.: +81 45 650 5610
Fax: +81 45 650 5611
www.bosch-motorsport.jp

Australia, New Zealand and South Africa:

Robert Bosch Pty. Ltd
Motorsport
1555 Centre Road
Clayton, Victoria, 3168
Australia
Tel.: +61 (3) 9541 3901
motor.sport@au.bosch.com