




Non-insulated Ring Terminals

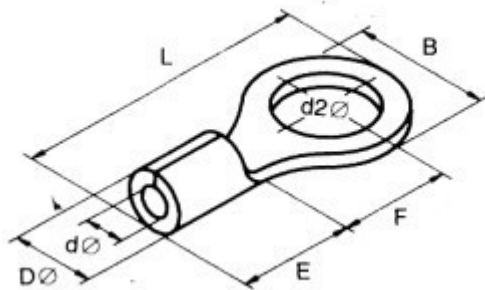

0.5 – 1.5mm² (22-16awg) I_{max}=19A

型号	尺寸							Dφ
	美制螺栓号	螺栓口直径 d2φ	B mm	L mm	F mm	E mm	Dφ mm	
RNB 1.25-3	#4	3.2mm	5.7	12.6	4.95	4.8	3.4	1.7
RNBS 1.25-3.5	#6	3.7mm	5.7	12.6	4.95			
RNBM 1.25-3.5	#6	3.7mm	6.6	14.4	6.3			
RNBL 1.25-3.5	#6	3.7mm	7.2	15.5	7.0			
RNBS 1.25-4	#8	4.3mm	6.6	14.4	6.3			
RNBL 1.25-4	#8	4.3mm	8.0	15.8	7.0			
RNBS 1.25-5	#10	5.3mm	8.0	15.8	7.0			
RNBL 1.25-5	#10	5.3mm	9.5	17.5	8.0			
RNBLL 1.25-5	#10	5.3mm	11.6	21.8	11.1			
RNB 1.25-6	1/4	6.5mm	11.6	21.8	11.1			
RNB 1.25-8	5/16	8.4mm	11.6	21.8	11.1			
RNB1.25-10	3/8	10.5mm	13.6	25.5	13.9			
RNB 1.25-12	1/2	13.0mm	19.2	30.4	16.0			

1.5 – 2.5mm² (16-14awg) I_{max}=27A

型 号	尺 寸							Dφ
	美制螺 栓号	螺栓口直径	B	L	F	E	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RNB 2-3	#4	3.2mm	6.6	12.3	4.3	4.8	4.1	2.3
RNBS 2-3.5	#6	3.7mm	6.6	12.3	4.3			
RNBM 2-3.5	#6	3.7mm	6.6	16.0	7.0			
RNBL 2-3.5	#6	3.7mm	8.5	16.8	7.75			
RNBS 2-4	#8	4.3mm	6.6	16.0	7.0			
RNBL 2-4	#8	4.3mm	8.5	16.8	7.75			
RNBS 2-5	#10	5.3mm	8.5	16.8	7.75			
RNBL 2-5	#10	5.3mm	9.5	16.8	7.75			
RNB 2-6	1/4	6.5mm	12.0	21.8	11.0			
RNB 2-8	5/16	8.4mm	12.0	21.8	11.0			
RNB 2-10	3/8	10.5mm	13.6	25.5	13.9			
RNB 2-12	1/2	13.0mm	18.0	29.0	16.0			

2.5 – 4mm² (14-12awg) I_{max}=37A

型 号	尺 寸							Dφ
	美制螺 栓号	螺栓口直径	B	L	F	E	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RNB 3.5-4	#8	4.3mm	8.0	18.0	7.7	6.0	5.0	3.0
RNBS 3.5-5	#10	5.3mm	8.0	18.0	7.7			
RNBL 3.5-5	#10	5.3mm	12.0	21.4	7.7			
RNB 3.5-6	1/4	6.5mm	12.0	21.4	7.7			
RNB 3.5-8	5/16	8.4mm	15.0	27.0	13.5			
RNB 3.5-10	3/8	10.5mm	15.0	27.0	13.5			

4 – 6mm² (12-10awg) I_{max}=48A

型 号	尺 寸							dφ
	美制螺 栓号	螺栓口直径	B	L	F	E	Dφ	
		d2φ	mm	mm	mm	mm	mm	
RNB 5.5-3.5	#6	3.7mm	7.2	15.7	5.9	6.8	5.6	3.4
RNBS 5.5-4	#8	4.3mm	7.2	15.7	5.9			
RNBL 5.5-4	#8	4.3mm	9.5	19.8	8.3			
RNB 5.5-5	#10	5.3mm	9.5	19.8	8.3			
RNB 5.5-6	1/4	6.5mm	12.0	25.8	13.0			
RNB 5.5-8	5/16	8.4mm	15.0	28.0	13.7			
RNB 5.5-10	3/8	10.5mm	15.0	28.0	13.7			
RNB 5.5-12	1/2	13.0mm	19.2	32.4	16.0			